

REV.	SPECIFICATION	ECN NO.	APPD.







**Material:**

Housing: PA66+30%GF, UL94V-0.  
 Contacts: Brass, Gold Plated on Contact Area and  
 100u" Tin Plated on Solder Tail over Nickel 50u".

**Electrical Characteristics:**

Voltage Rating: 250V.  
 Current Rating: 1 AMP.  
 Dielectric Withstanding Voltage: AC 500V.  
 Insulator Resistance: 1000MΩ min.  
 Contact Resistance: 30mΩ max.  
 Operating Temperature: -55°C~+105°C.

**\*RoHS Compliant**

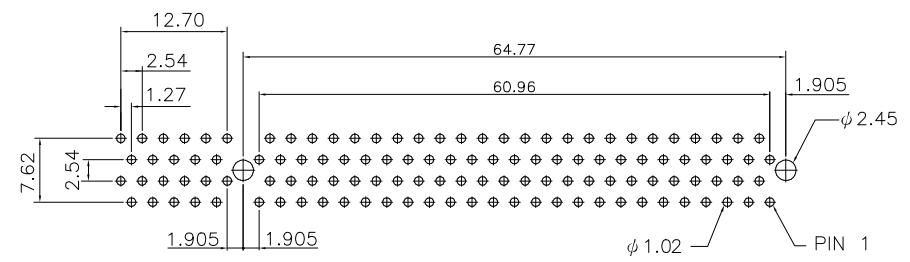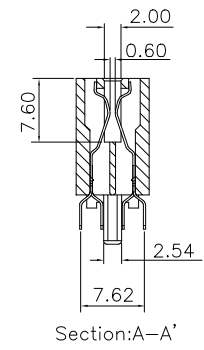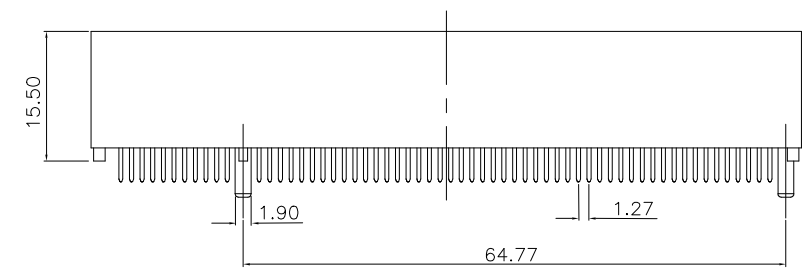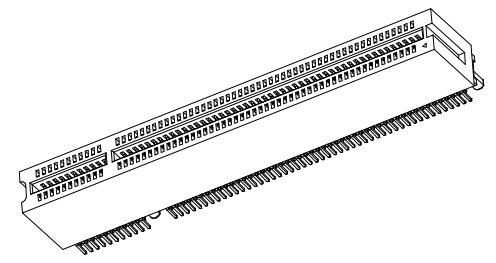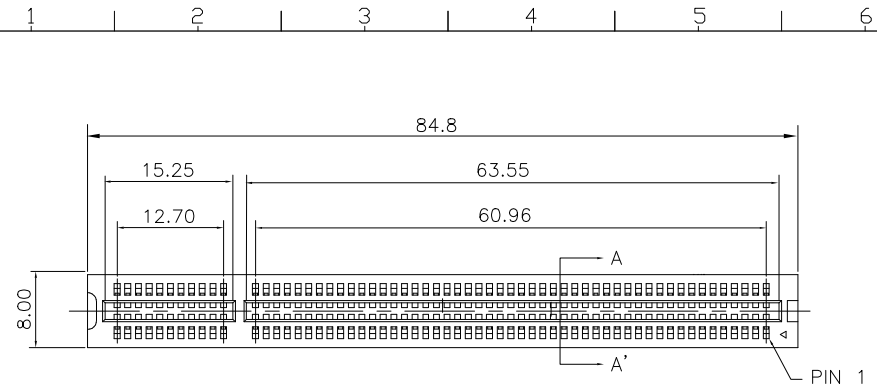

P.C. Board Layout

8206-   120   N   P   A  
 Series   Position   N: Internal Code   P: With Post   A: Tray Package

Tolerances x = ±0.30 .x = ±0.30 .xx = ±0.20 .xxx = ±0.05	Dwg. No.	8206D02001		Title: 8206 Series PCI 120P Connector ①720					
	Projection								OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8206-120NPA
	Unit	mm	Scale		1:N	SHEET	1/1	Ver.No.	
	Drawn By	Martin 12/02'21							