

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

| | | | | | |
|--------------------------------|--|--|--|--|--------|
| SPEC.NO.(規範編號) Q9392SPP-999 | | APPLICABLE PRODUCT (適用產品) 9392-4S16P04N1xCxxDA | | PAGE 1/4 | REV. B |
| APPLICABLE CUSTOMER (適用客戶) ALL | | | | PACKAGING CATEGORY (包裝方式) TRAY PLATE PACKING | |

REVISION HISTORY (修訂履歷)

| ECN NO REV. | PAGE (頁次) | | | | | | | | |
|----------------|----------------------------------|---|---|---|--|--|--|--|--|
| | 1 | 2 | 3 | 4 | | | | | |
| A | NEW 新品发行 | | | | | | | | |
| B | Modify the column bag (修改气柱袋) | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

| | | | |
|---|---------------|--------------|---------------------------|
| DIVISION (事業單位) Product Development (產品開發課) | APPROVED (核准) | CHECKED (審核) | PREPARED (制表) WP 11/15'17 |
|---|---------------|--------------|---------------------------|

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

SPEC.NO.(規範編號) Q9392SPP-999

CONFIDENTIAL
 TOP SECRET

PAGE 2/4 REV. B

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備注)

Laying Product Diagram:
(產品擺放圖示)

一.PET Plate Packing Mode:
(PET盤包裝方式)

(1).CT-0.9 Box: PET-9392-019 xx PCS.
(CT-0.9規格的紙箱放PET-9392-019盤 xx PCS)

(2).Put product in each trough fully as shown in diagram. such as Fig1-1.
(產品在盤子中擺放方式如圖1-1所示)


(3).After filling each trough with product fully,cover it with transparent upper cover PET-9392-020 1PCS. the cover should be booked with the plate together, so as not to cause the products to fall scattered.

(每盤放滿產品後,加蓋透明上蓋 PET-9392-020 1PCS并在每個盤子上面加蓋子1PCS,蓋子要與底盤訂在一起,以免造成產品散落。)


(4)The label of minimum supplies label (the design of the supplies label is such as Fig. 2)and season is stuck separately on each cover(such as Fig. 2).

在每個蓋子的上面分別貼批次標籤(樣式如圖2)與季節標籤(如圖2)。

(5).Stack the xx PET plates filled with product, put them in the paper box in which has been put waterproof bag.
(將放滿產品的xx個PET盤疊起,裝入防水袋放入紙箱內)

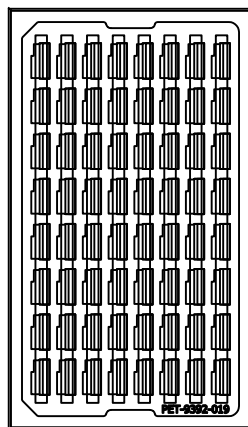

(Drawing 1-1)
(圖1-1)

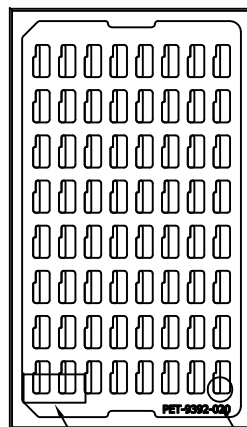

批次標籤
Season label
季節標籤
(Drawing 2)
(圖2)

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

| | | | |
|--|-----|-------------------------------------|---|
| <input checked="" type="checkbox"/> CONFIDENTIAL | | <input type="checkbox"/> TOP SECRET | |
| PAGE | 3/4 | REV. | B |

SPEC.NO.(規範編號) Q9392SPP-999

| PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明) | REMARK (備注) |
|---|---|
| <p>The diagram illustrates the packaging process in four stages:</p> <ul style="list-style-type: none"> Drawing One (圖一): Shows a stack of 'XX Plates (XX盤)' being placed between two 'Air column bag (气柱袋)' units. Drawing Two (圖二): Shows the stack from Drawing One being placed inside a 'Waterproof Bag (防水袋)'. Below this is the specification for the 'Paper Box CT-0.9 Specification: 475*275*225 (紙箱 CT-0.9規格: 475*275*225)'. Drawing Three (圖三): Shows the final sealed 'outer box' with a label on the side. | <p>一. Outer Box Packing Mode: (外箱包裝方式)</p> <ol style="list-style-type: none"> (1). Paper box 0.9 standard 1 PCS, as shown in drawing Two. (紙箱 0.9 規格 1 PCS, 如(圖二)所示) (2). Put one Air column bag in the upper and lower of the paper box, 2PCS in all, as shown in drawing One. (每箱上下各放一塊气柱袋共2PCS, 如(圖一)所示) (3). Put 1 PCS waterproof in the paper box, as shown in drawing Two. (紙箱內側放入防水袋 1 PCS, 如(圖二)所示) (4). Piled the XX packing plates packed up in the waterproof. (將放滿產品的XX個PET盤疊起, 裝入防水袋內) (5). Seal the waterproof bag, then put the Air column bag 1PCS on the bag, if box can not be filled, filled with ploy. (Put 1 PCS Air column bag at the right and left side in the paper box if it is necessary.) <u>封上防水袋後, 放上第二塊气柱袋, 未填滿處用气柱袋填滿。 (必要時, 在紙箱的左右兩側各放一塊气柱袋)</u> (6). Seal the surface of the outer box, as shown in drawing Three. (將外箱上層封口, 如(圖三)所示) (7). The form on the right and flank side of the box must be filled correctly and clearly, take actual testing weight as the standard of each box gross weight. 外箱之正麥和側麥所要填寫之項目要填寫正確, 清晰, 每箱之毛重應以實測重量為準。 |

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

PAGE: 4/4 REV. B

SPEC.NO.(規範編號) Q9392SPP-999

| PACKING MATERIAL (包裝材料) | | | PRODUCT P/N | CT NO. | PACKING N.W. | PACKING QUANTITY (包裝數量) | | | WEIGHT (重量) kg | | |
|---------------------------|---------------|------|----------------------|--------|--------------|-------------------------|----------|---------|----------------|----------|----------|
| MATERIAL NAME (材料名稱) | PART NO. (料號) | Q'TY | (產品料號) | (紙箱規格) | (包材重量) | PCS/TRAY | TRAY/BOX | PCS/BOX | N.W./PCS | N.W./BOX | G.W./BOX |
| PAPER BOXES (紙箱) | CT-0.5 | 1 | 9392-4S16P04N1xCxxDA | CT-0.9 | 2.96 | 64 | 6 | 384 | 0.0068474 | 2.63 | 5.59 |
| Packing Box (包裝盒) | PET-9392-019 | ---- | | | | | | | | | |
| Packing Box Cover (包裝盒蓋子) | PET-9392-020 | ---- | | | | | | | | | |
| WATERPROOF BAG (防水袋) | PE 100*70 | 1 | | | | | | | | | |
| Air column bag (氣柱袋) | QZD-A | 2 | | | | | | | | | |
| DRYING AGENT (干燥劑) | ----- | 3 | | | | | | | | | |
| | | | | | | | | | | | |

1.NOTE:
 (注意)
 When the finished products have been made,take the actual weight as the standard of gross weight in each box.(成品出貨時,每箱之毛重應以實測重量為準)
 When the finished products have been made,stick the proper designation list on the box according to product demand.(成品出貨時,依據出貨要求貼上相對應的標籤單)
 CT-1.6 Produce goods taiwan ,CT-1.9 Produce goods shanghai. (CT-1.6出貨台灣OP,CT-1.9出貨上海SH)
 It doesn't influence the manner of packing with the gold-plated way to print word way,Can amalgamate.(印字方式跟鍍金方式不影響包裝方式可以共用)

2.NOTE:
 (注意)
 *Pay attention to each big reel of material ,can be divided into 3 small reels,consumption of each big reel can't exceed 1meter, or the third reel can't be packed
 (來料每大卷reel (carrier tape) 平均可分3小卷reel ,每大卷reel 消耗量不可超過1米,否則第三小卷不可包裝)