

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: PA9T, UL94V-0, Red

Contacts: Phosphor Bronze, Matte Tin Plated over Nickel 50u".

Electrical Characteristics:

Current Rating: 1.5 AMP





Dielectric Withstanding Voltage: AC 500V.

Insulation Resistance: 1000M Ω min.

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

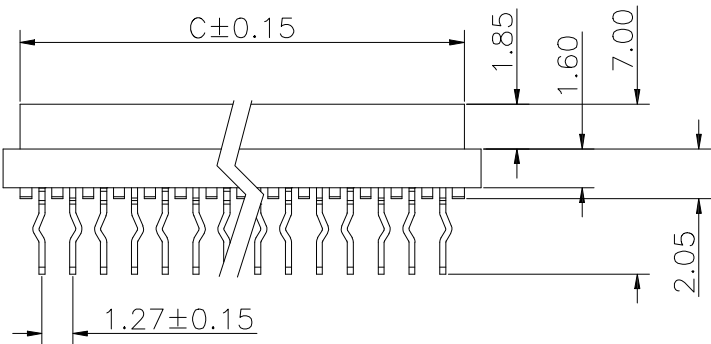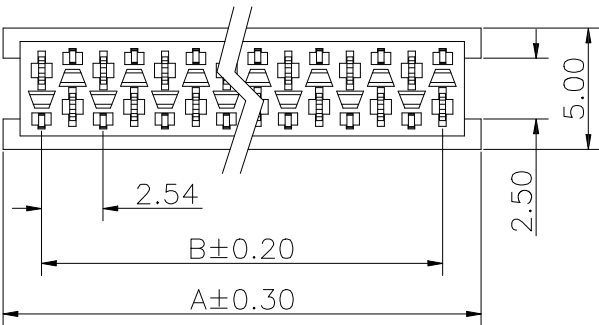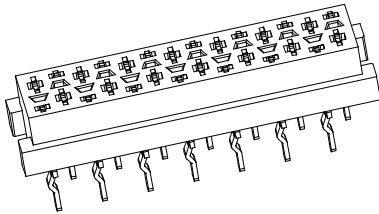

6022-C xx MT S R T -P

Series

No. of Positions

MT: Matte Tin Plated

S: Straight


P: With Plastic Pad

Blank: W/O Plastic Pad

T: Tape & Reel Package

U: Tube Package

R: Red

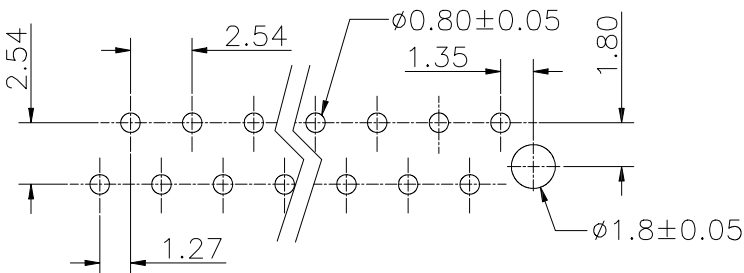

PCB Layout

Tolerances		Dwg. No.		S2620221118-01	
.x = ±0.2 .xx = ±0.15	Projection				
	Unit	mm	Scale	1:N	
	Drawn By		Martin 11/18'22		

Title:

6022-C Series

Mirco-Match Miniature

2 54mm Straight Type

① 738



OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 6022-CxxMTSRT-

Positions	A	B	C	Positions	A	B	C
04	7.00	3.81	5.60	16	22.24	19.05	20.84
06	9.54	6.35	8.14	18	24.78	21.59	23.38
08	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54