REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN250233	

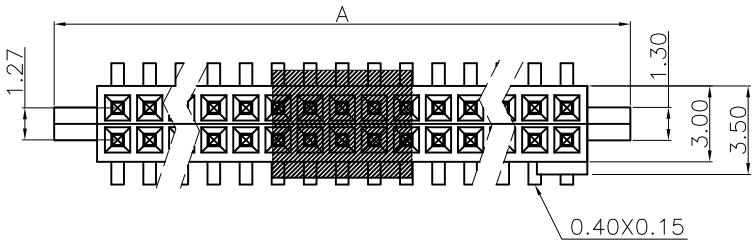

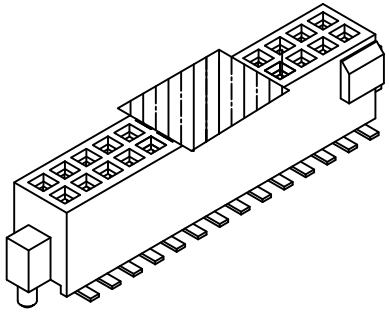

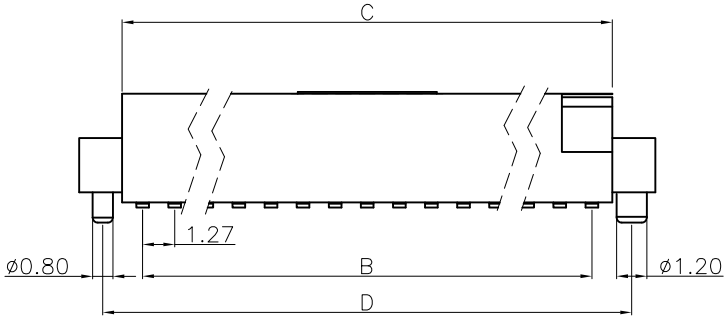

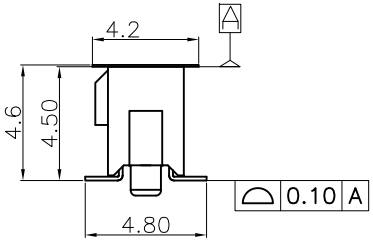

Material and Plating:

Housing: LCP , UL94V-0 ,Black .

Contacts: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin Plated or Gold Flash on Solder Tail over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 500V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -65℃~+125℃.

***RoHS Compliant**

Insertion Depth: 1.90mm to 2.90mm

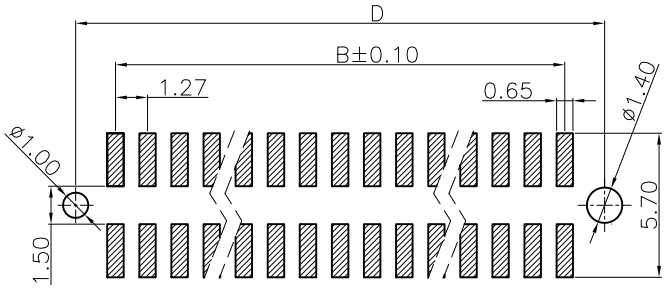

P.C. Board Layout
(Tolerance ±0.05mm)

2243- xx C xx D P T -S

- Series
- No.of Position
- C: Selective Gold Plated / G: Gold Plated
- 00: G/F / 10: 10μ″ / 15: 15μ″ / 30: 30μ″
- D: Surface Mount
- P: With Post
- T: Tape & Reel Package / U: Tube Package
- S:Mylar

Position / Dimension	10 Thru 100
A	1.27 X No. of Positions/2 +3.78
B	1.27 X No. of Positions/2 -1.27
C	1.27 X No. of Positions/2 +0.38
D	1.27 X No. of Positions/2 +1.91

Tolerances	Dwg.No.	2243D02020	Title: 2243 Series P.C.B. Socket 1.27mmX1.27mm	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.50	Projection			P/N: 2243-xxCxxDPT-S
.x = ±0.25	Unit mm	Scale 1:1		SHEET 1/1 Ver. No. R6
.xx = ±0.15	Drawn By	CCH2/20/25		