

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN250449	

Material and Plating:

Housing: LCP,UL94V-0 , BLACK.

Power Contacts: High Conductivity Copper.
30u"Au+Pd/Ni on Contact Area and 80u" Min
Tin Plated on Solder Tail over nickel 50u" Min .

Signal Contact: Phosphor Bronze.

30u"Au+Pd/Ni on Contact Area and 80u" Min
Tin Plated on Solder Tail over nickel 50u" Min.

Electrical Characteristics:

Current Rating: Signal Pin 2.5 AMP.

Power Pin 60 AMP.

Dielectric Withstanding Voltage: DC 1500V For 1 minute.

Insulator Resistance: 5000MΩ min. at DC 500V.

Contact Resistance: Signal Pin 30mΩ max.

Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+125°C .







*RoHS Compliant

Notes :

L: Low Power---PCB Mount 3.0mm Pitch

D: DC Power---PCB Mount 5.5mm Pitch

A: AC Power---PCB Mount 7.5mm Pitch

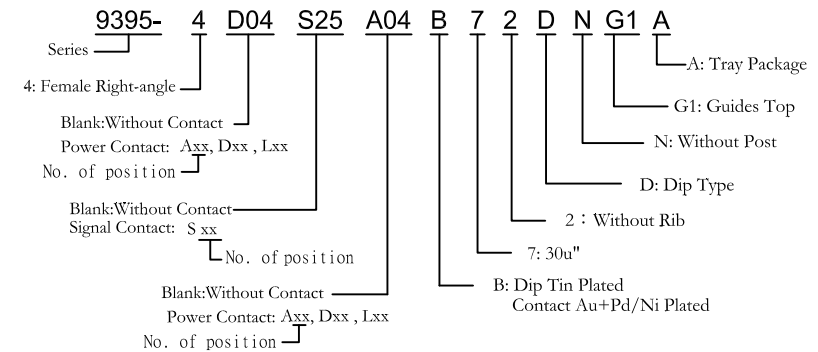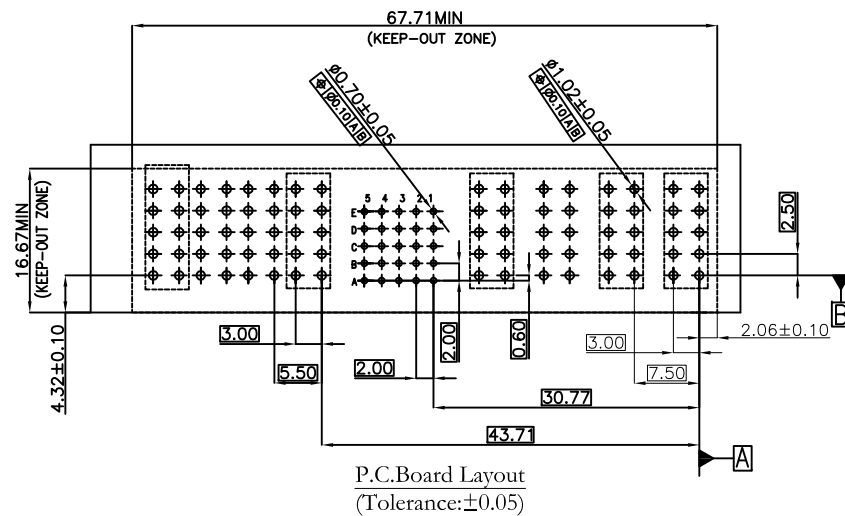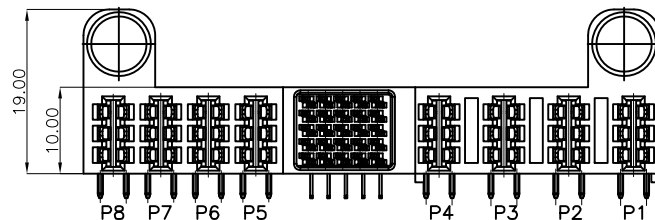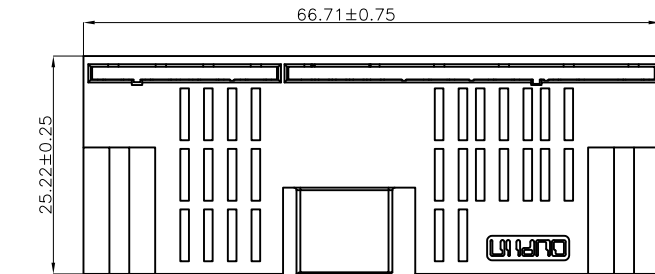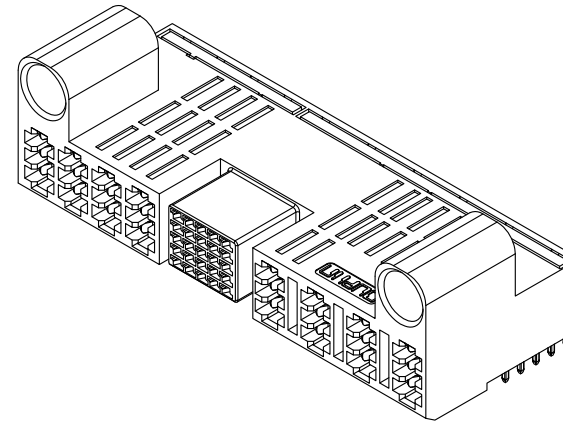

Tolerances	Dwg. No.	9395-D0000-004		Title: 9395 Series Max P60 10mm Low Profile, 60Amp Receptable, Right Angle	OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N:9395-4D04S25A04B72DNG1A			
x = ±0.5	Projection				SHEET			
.x = ±0.25	Unit	mm	Scale		1:1	1/1		
.xx = ±0.15	Drawn By	XM 04/21'25			Ver. No.			R3