
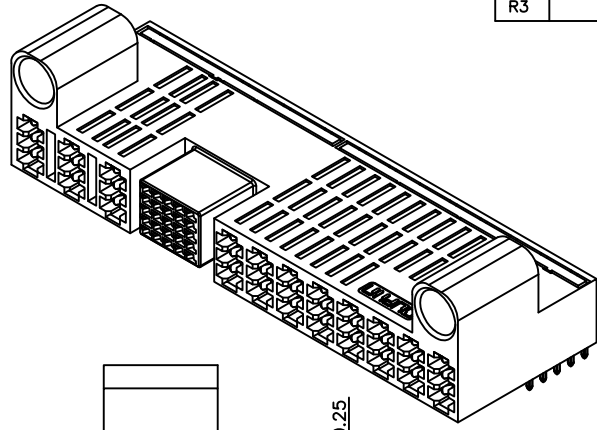


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN250449	

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

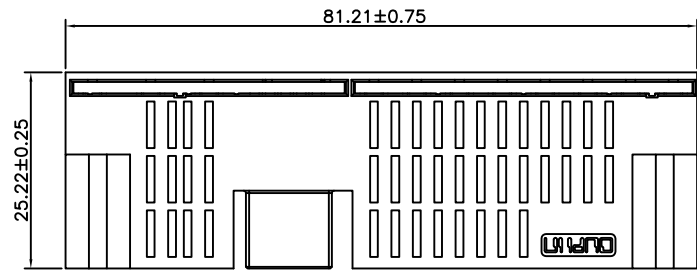

Material and Plating:

Housing: LCP, UL94V-0 , BLACK.
Power Contacts:High Conductivity Copper.
30u"Au+Pd/Ni on Contact Area and 80u" Min
Tin Plated on Solder Tail over nickel 50u" Min .
Signal Contact: Phosphor Bronze.
30u"Au+Pd/Ni on Contact Area and 80u" Min
Tin Plated on Solder Tail over nickel 50u" Min.

Electrical Characteristics:





Current Rating: Signal Pin 2.5 AMP.
Power Pin 60 AMP.
Dielectric Withstanding Voltage: DC 1500V For 1 minute.
Insulator Resistance: 5000MΩ min. at DC 500V.
Contact Resistance: Signal Pin 30mΩ max.
Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+125°C .

***RoHS Compliant**

Notes :

- L: Low Power---PCB Mount 3.0mm Pitch
- D: DC Power---PCB Mount 5.5mm Pitch
- A: AC Power---PCB Mount 7.5mm Pitch

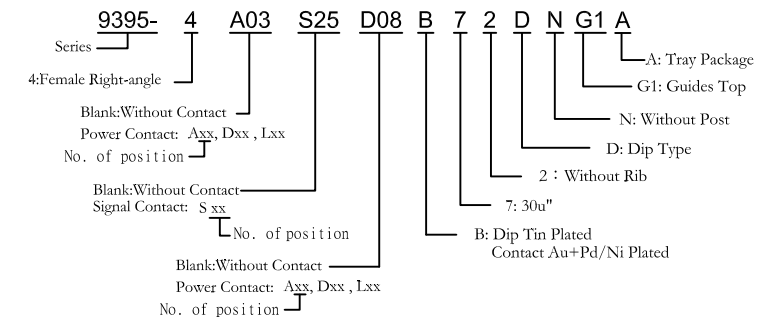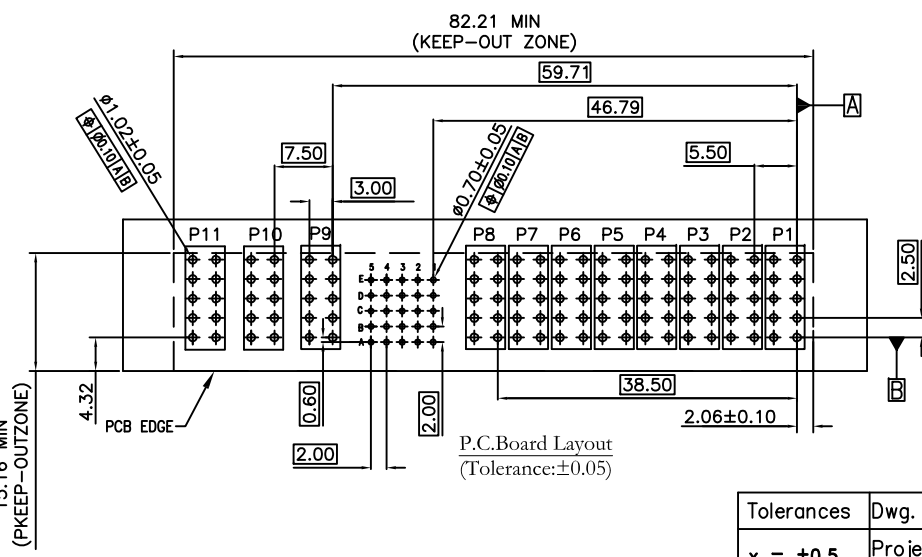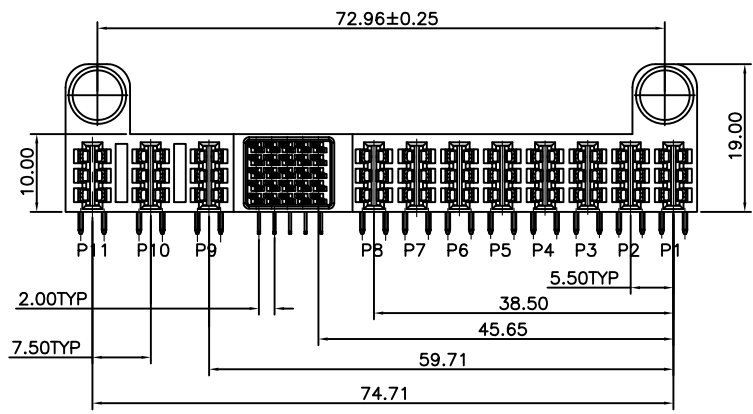

Tolerances	Dwg. No.	9395-D0000-005		Title: 9395 Series Max P60 10mm Low Profile, 60Amp Receptable, Right Angle		OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9395-4A03S25D08B72DNG1A				
x = ±0.5	Projection					SHEET	1/1	Ver. No.	R3	
.x = ±0.25	Unit	mm	Scale							1:1
.xx = ±0.15	Drawn By		XM 04/21'25							