

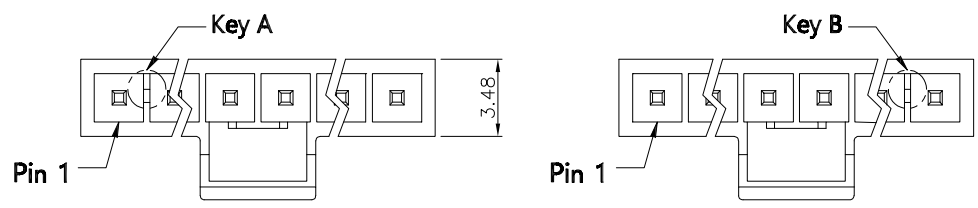
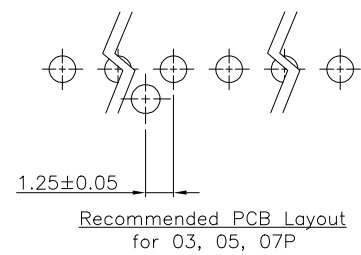
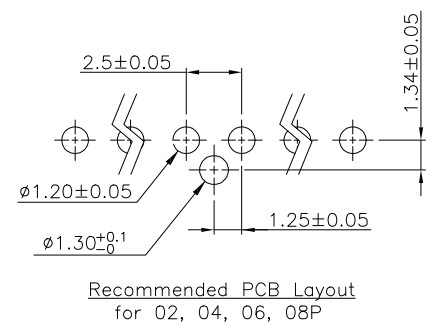
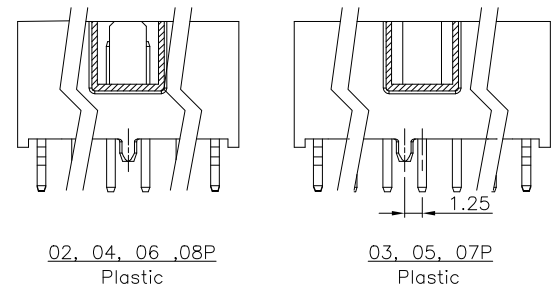


REV.	SPECIFICATION	ECN NO.	APPD.

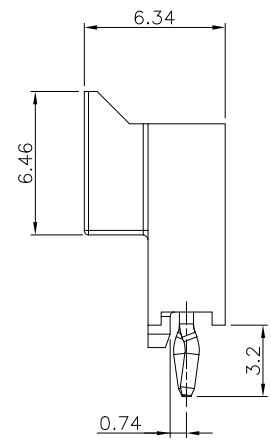

Material:
Housing: LCP, UL94V-0.
Contacts: Brass, 100u" Tin Plated or Gold Plated over Nickel 30u"
Electrical Characteristics:
Current Rating: 4.5 AMP.
Dielectric Withstanding Voltage: AC 1500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 10mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**







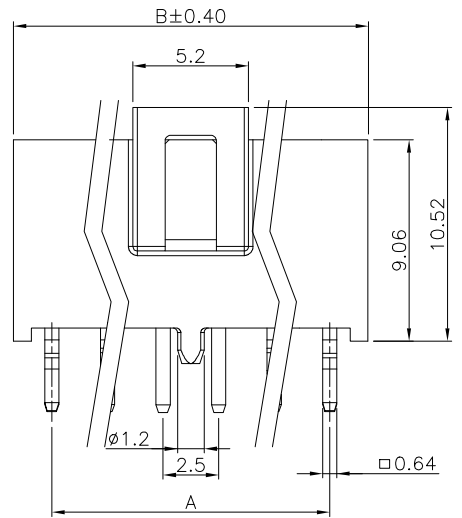




4671- 1 X xx T S P x B
Series ————
Single Row ————
Positions ————
T: Tin Plated ————
G15: Gold Plated 15u" ————
G30: Gold Plated 30u" ————
S: Straight ————
P: With Post ————
B: Bulk Package ————
A: A Key Only Black Color ————
B: B Key Only Natural Color ————

Positions	Dimensions	
	A	B
02	2.50	5.94
03	5.00	8.44
04	7.50	10.94
05	10.00	13.44
06	12.50	15.94
07	15.00	18.44
08	17.50	20.94

Tolerances	Dwg. No.	S0220220408-01	Title:	4671 Series	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4671-1XxxTSPxB SHEET 1/2 Ver.No. X3
.x = ±0.4	Projection		Wafer 2.50mm Straight Type		
.xx = ±0.25	Unit	mm	Scale 1:N		
.xxx = ±0.08	Drawn By	Martin 11/27'23	Single Row with Post	①667	

REV.	SPECIFICATION	ECN NO.	APPD.

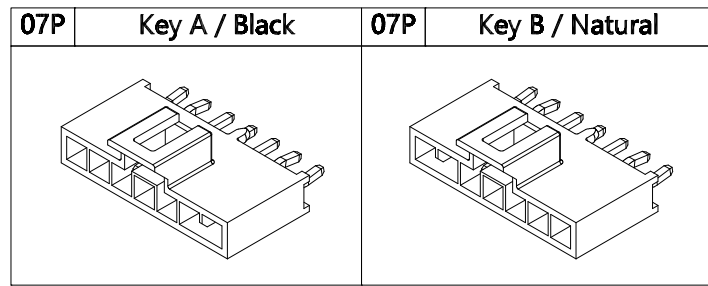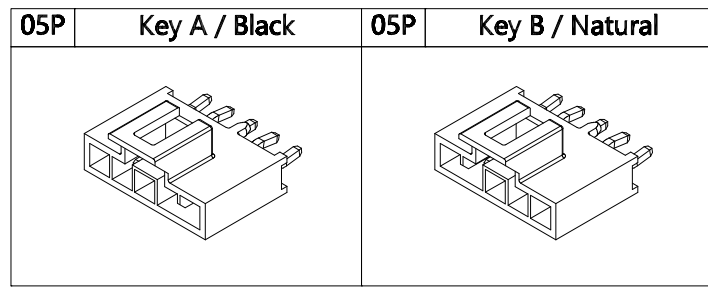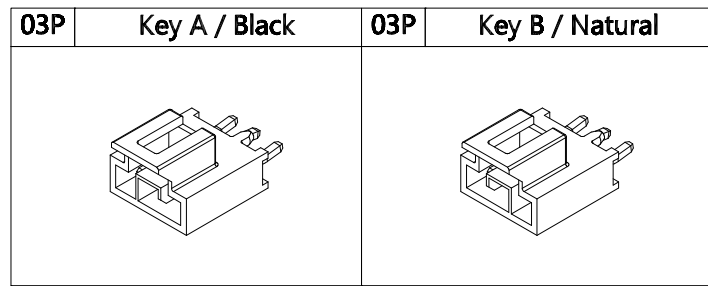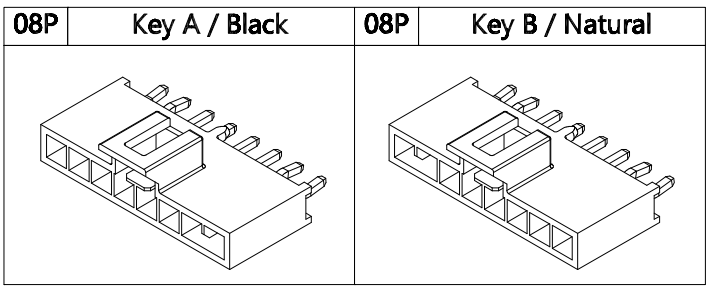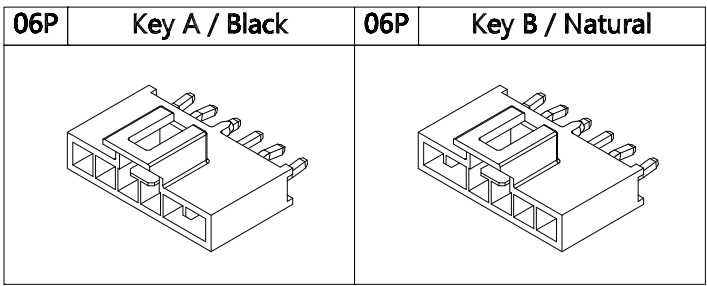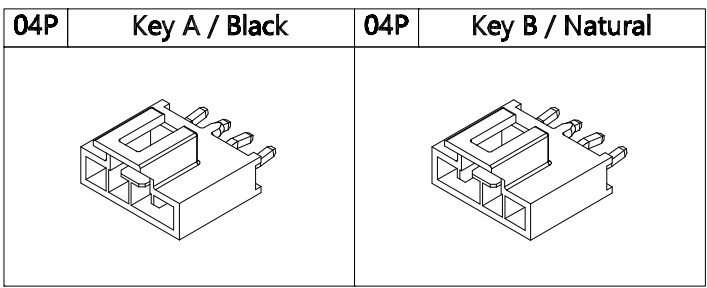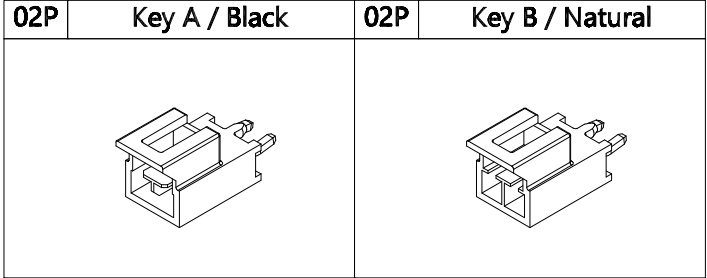

Tolerances .x = ±0.4 .xx = ±0.25 .xxx = ±0.08	Dwg. No.	S0220220408-01		Title: 4671 Series Wafer 2.50mm Straight Type Single Row with Post ① 667	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4671-1XxxTSPxB SHEET 2/2 Ver.No. X3	
	Projection					
	Unit	<i>mm</i>	Scale			1:N
	Drawn By	Martin 11/27'23				