


REV.	SPECIFICATION	ECN NO.	APPD.


Material:
Housing: PBT, UL94V-0.
Contacts: Brass,Gold Plated over Nickel 30 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 20m Ω max. at DC 100mA.
Operating Temperature: -55°C~+105°C.





***RoHS Compliant**



Male

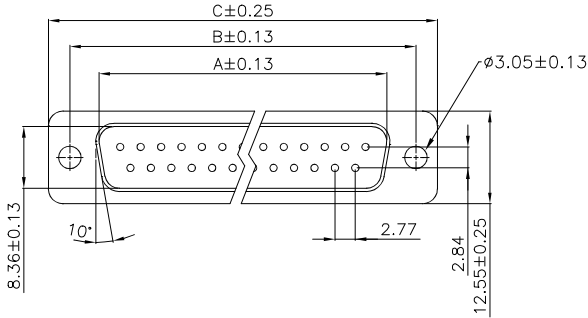

Female

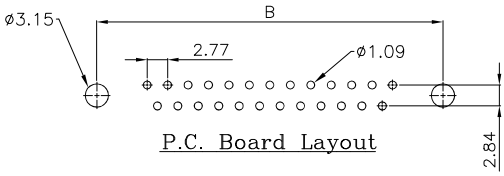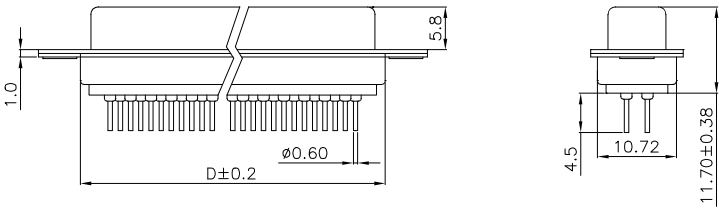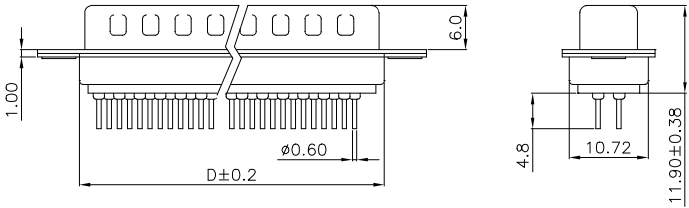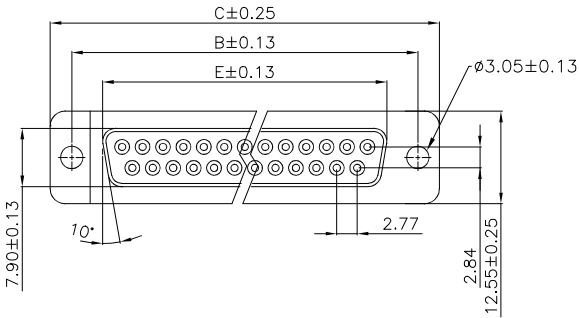

7905- xx x T x G 00 A

Series —
Position —
M: Male
F: Female
B: Black
U: Blue
W: White

A: Tray Package
00: Gold Flash
G: Gold Plated

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84

Tolerances	Dwg. No.	7905D03001			Title: 7905 Series D-SUB Straight Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.5	Projection					P/N: 7905-xxxTxG00A			
.x = ±0.25	Unit	mm	Scale	1:1		SHEET			1/1
.xx = ±0.15	Drawn By	Martin 05/20'25				Ver.No.			B4