

REV.	SPECIFICATION	ECN NO.	APPD.
X2			

Material and Plating:

Housing: LCP, UL94V-0, Black.

Contacts: Phosphor Bronze

Gold Plated on Contact Area and 80u" Min

Tin Plated on Solder Tail over nickel 50u" Min .

Counterweight: Brass

Latches: Phosphor Bronze

Electrical Characteristics:

Current Rating: 1.4 AMP.



Dielectric Withstanding Voltage: AC 900V For 1 Minute.

Insulation Resistance: 50000M Ω min.


Contact Resistance: 25m Ω max.

Operating Temperature: -55°C~+125°C.



***RoHS Compliant**

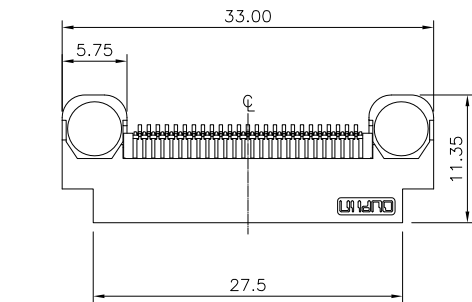



Detail C
Scale 5:1




Detail D
Scale 5:1

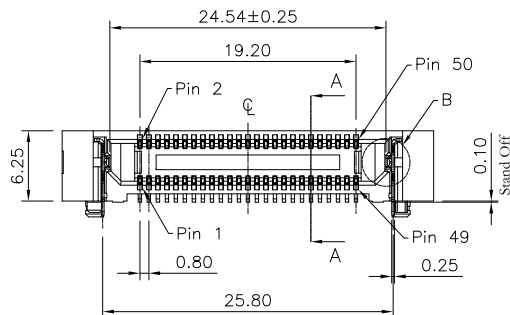

Section A-A

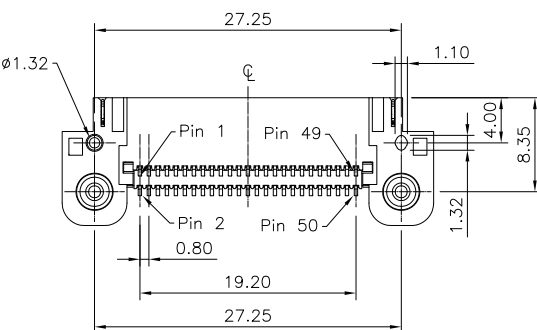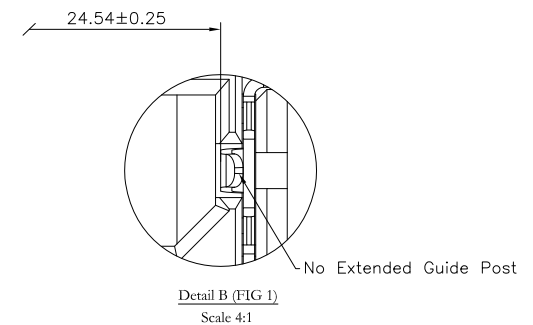

2386- 4 2 X 25 C 3 D 3 M NG T
 Series
 4:Female Right Angle
 Double Row
 Position Per Row
 C: Selective Gold Plated
 3: 10u"
 7: 30u"
 D:SMD Type
 Code3
 T: Tape&Reel Package
 NG: With Lock, No Extended Guide Post , See FIG 1
 L1: With Lock, Extended Guide Post , See FIG 2
 L: With Lock, No Spring Strip, See FIG 3
 N: W/O lock
 M: Metal Post
 Blank: W/O Metal Post

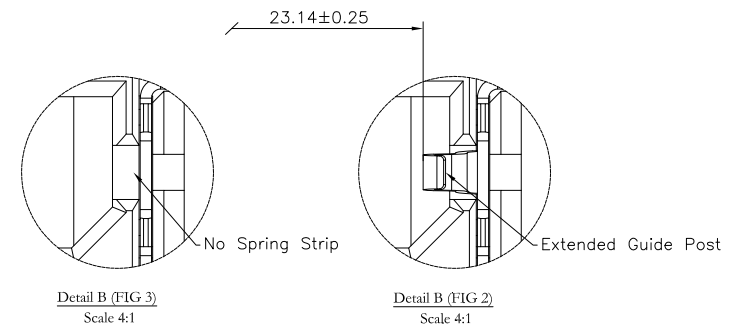

PROPOSAL ONLY

Tolerances	Dwg No.	2386-D0000-017
x = ± 0.50	Projection	$\oplus$ $\triangleleft$
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	WP 08/12'25

Title:
2386 Series
Female Right Angle

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2386-42X25C3D3MNGT			
SHEET	1/2	Ver.No.	X2

