

REV.	SPECIFICATION	ECN NO.	APPD.
R8		ECN250960	

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper.

30u"Au+Pd/Ni on Contact Area and 80u" Min Tin

Plated on Solder Tail over nickel 50u" Min .

Signal Contacts : Phosphor Bronze.

30u"Au+Pd/Ni on Contact Area and 80u" Min Tin

Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:

Current Rating: Signal Pin 1.0 AMP.

Power Pin 45 AMP(UL).

Insulator Resistance: 5000MΩ min. at DC 500V.

Dielectric Withstanding Voltage:

Signal Pin DC 1500V For 1 minute.






Power Pin DC 1500V For 1 minute.

Contact Resistance: Signal Pin 20mΩ max.


Power Pin 5.0mΩ max.

Operating Temperature: -40°C ~+105°C .


***RoHS Compliant**

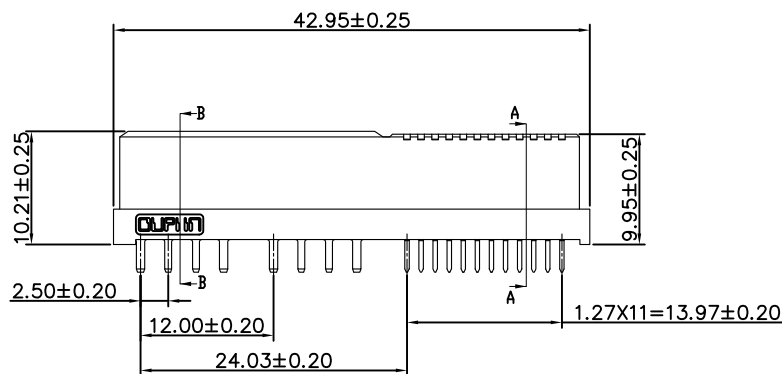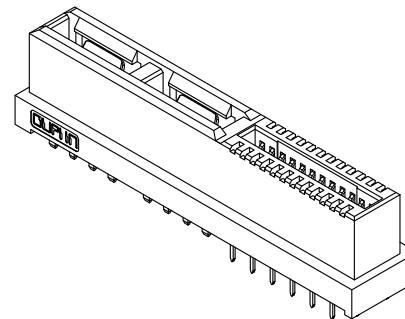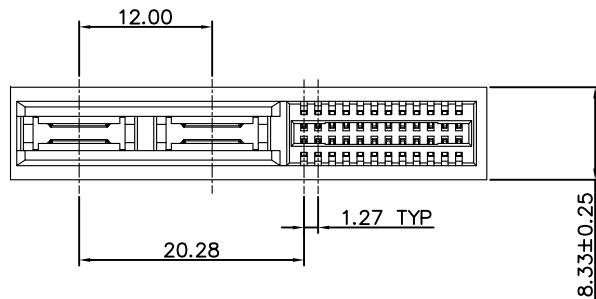

Section B-B



Section A-A

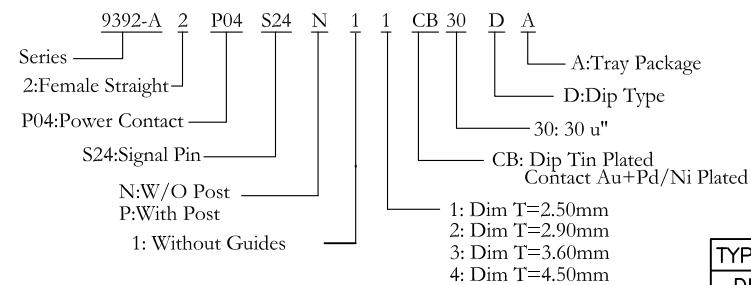

Tolerances	Dwg. No.	9392-D0000-017	
x = ±0.5	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	XM 09/26'25	

Title:

9392 Series
Low Profile Hybrid
Power Receptacle

TYPE NO.	1	2	3	4
DIM T	2.50	2.90	3.60	4.50


OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.


P/N:9392-A2P04S24N11CB30DA

SHEET	1/2	Ver. No.	R8
-------	-----	----------	----

REV.	SPECIFICATION	ECN NO.	APPD.
R8		ECN250960	

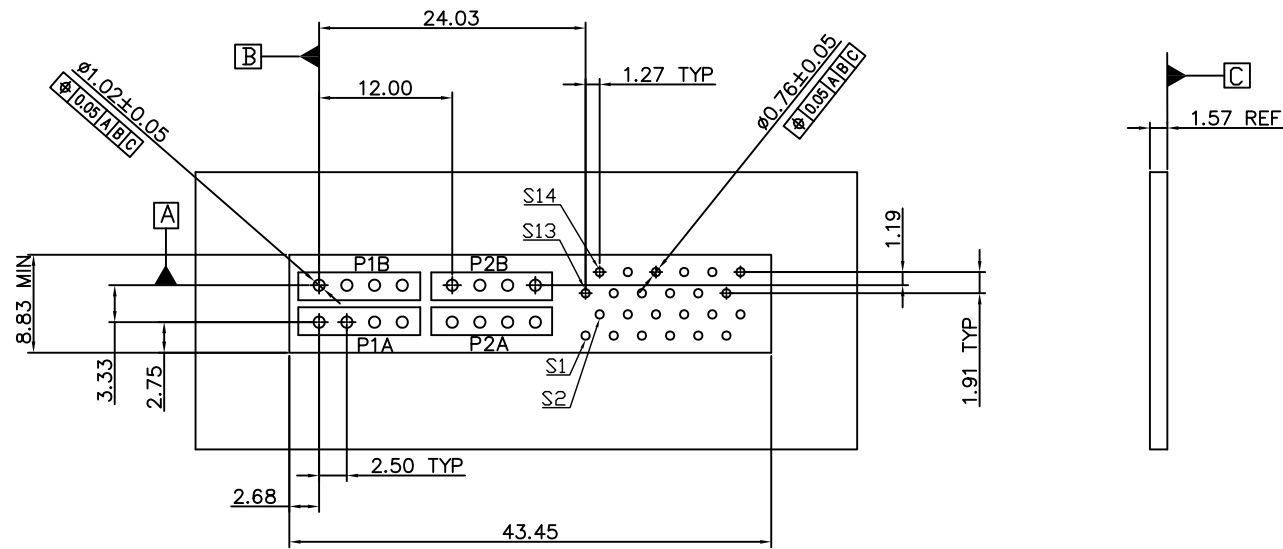

P.C.Board Layout
(Tolerance:±0.05)

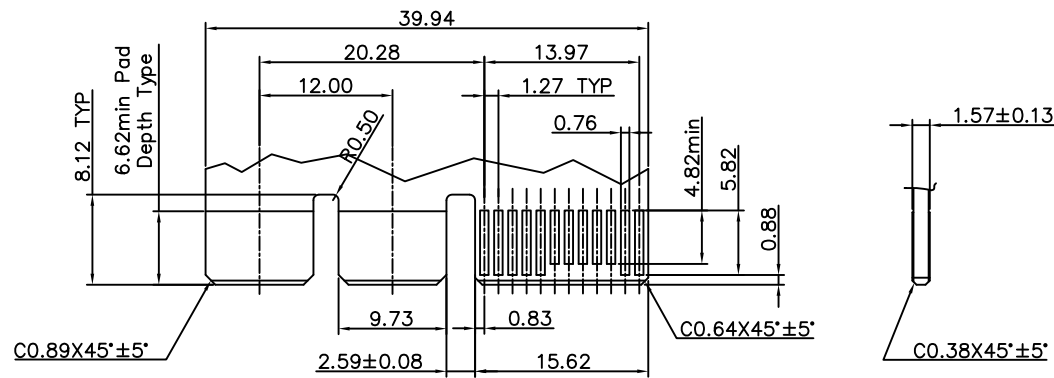

Recommended Edge Card Layout
(Tolerance:±0.05)

Tolerances	Dwg. No.	9392-D0000-017
x = ±0.5	Projection	⊕ ⊖
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	XM 09/26'25

Title:
9392 Series
Low Profile Hybrid
Power Receptacle

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N:9392-A2P04S24N11CB30DA			
SHEET	2/2	Ver. No.	R8