


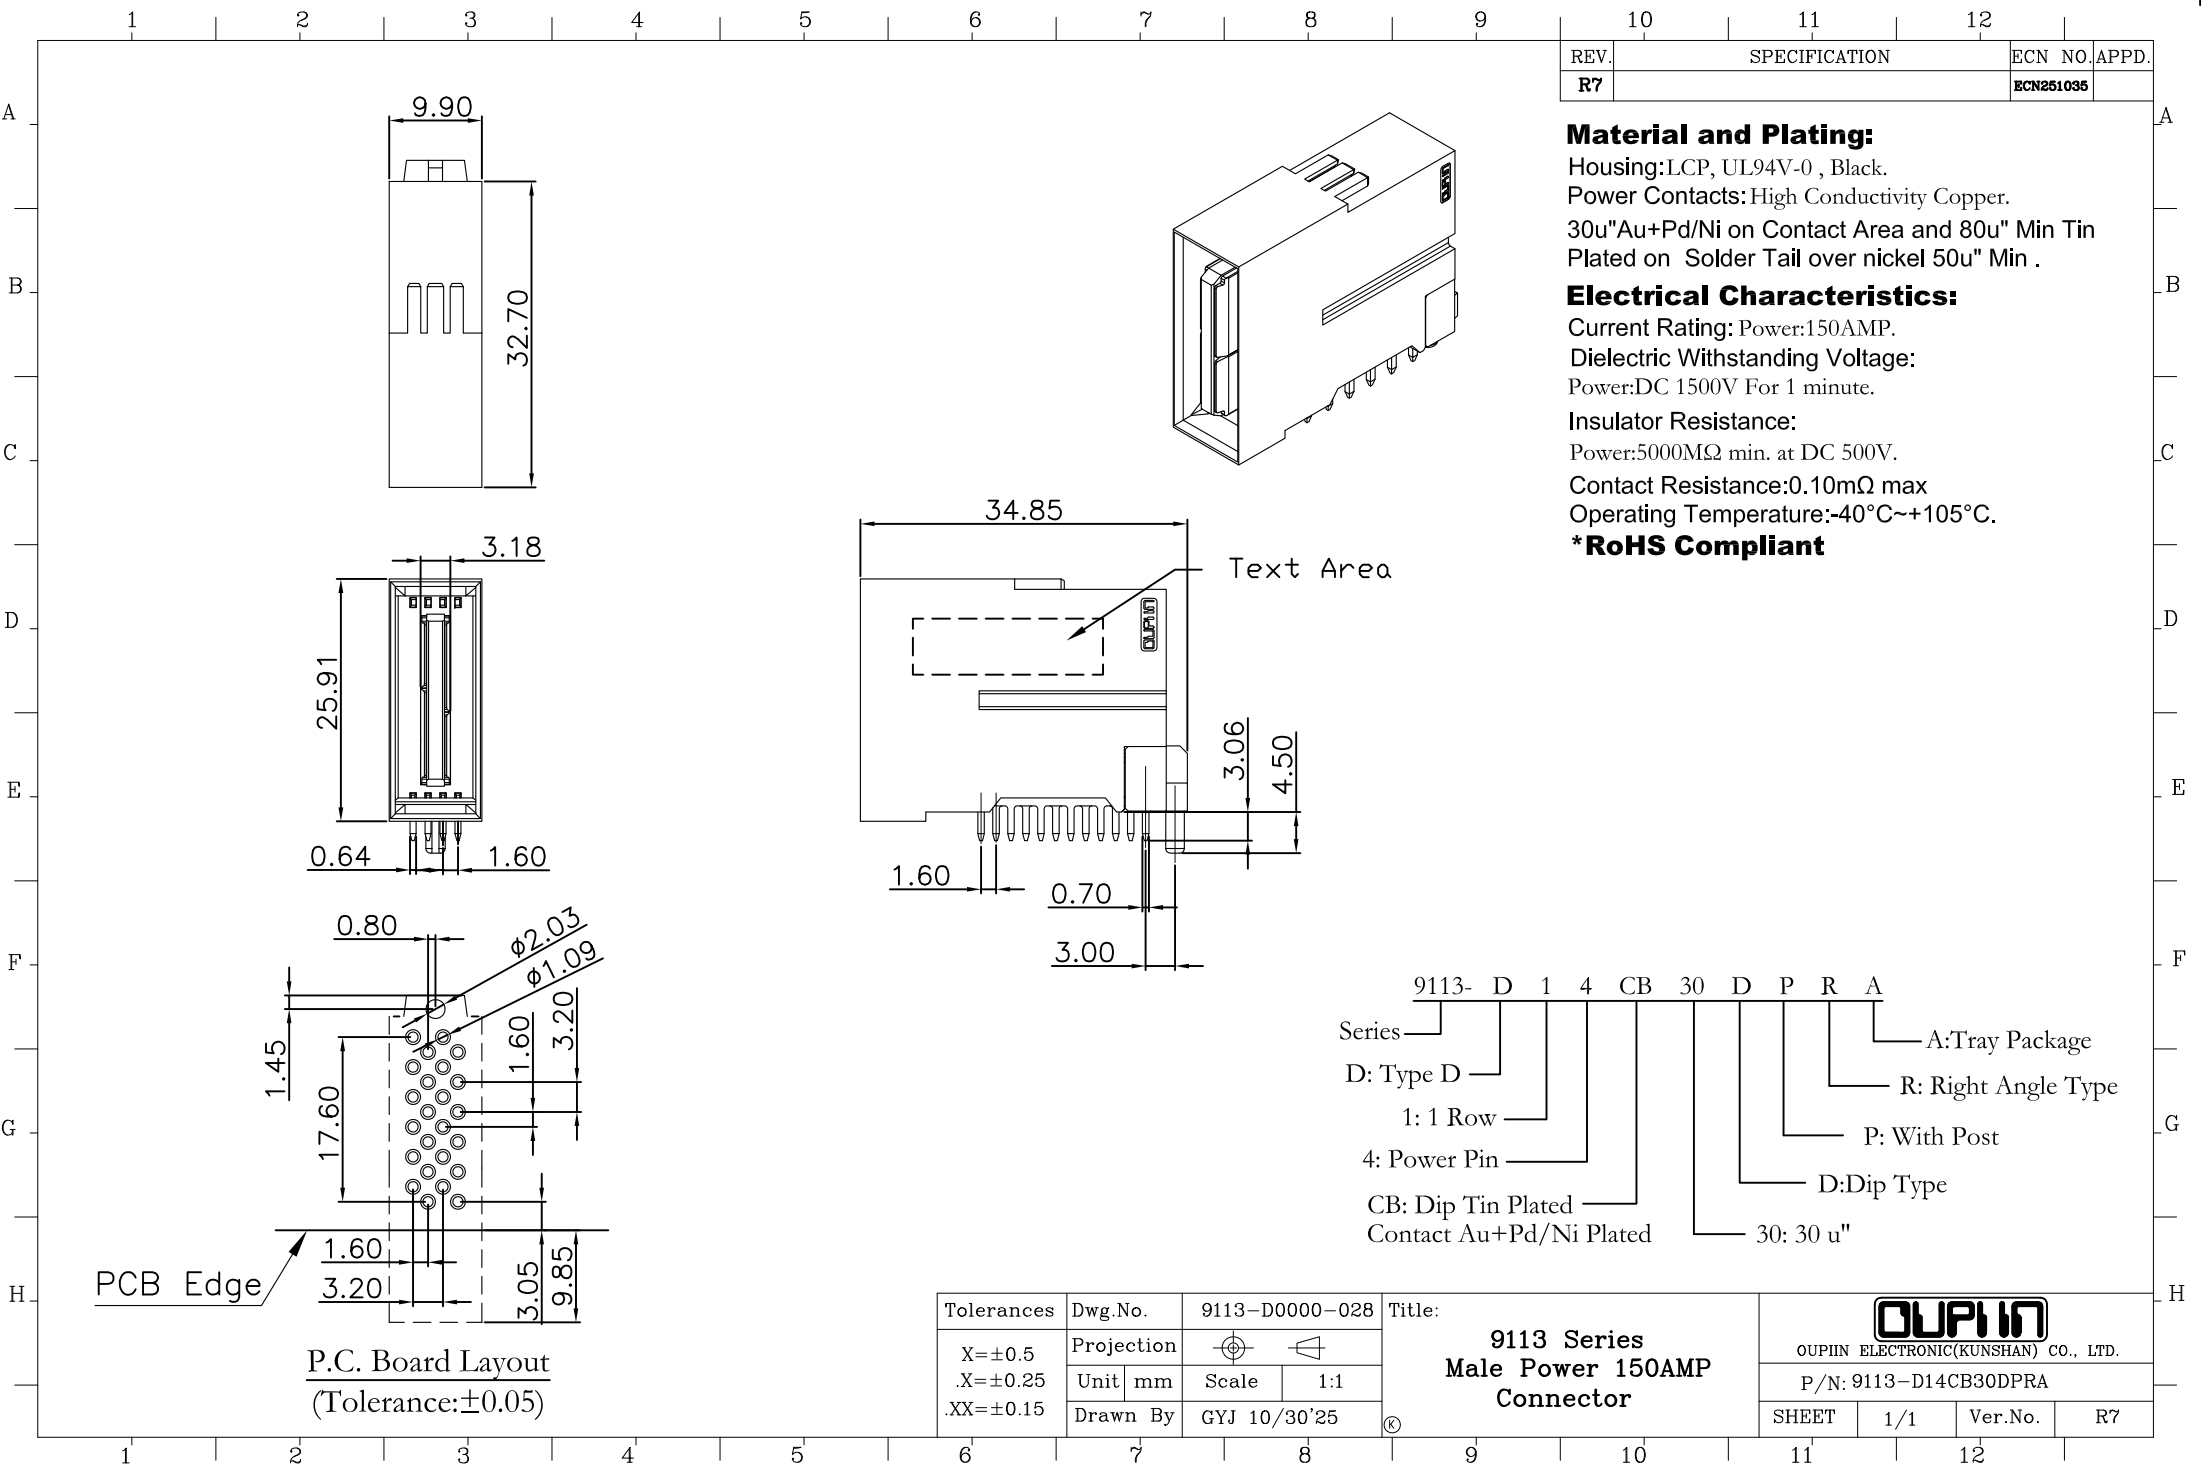

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN251035	

Material and Plating:
Housing:LCP, UL94V-0 , Black.
Power Contacts:High Conductivity Copper.
30u"Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:
Current Rating: Power:150AMP.
Dielectric Withstanding Voltage:
Power:DC 1500V For 1 minute.
Insulator Resistance:
Power:5000MΩ min. at DC 500V.
Contact Resistance:0.10mΩ max
Operating Temperature:-40°C~+105°C.
***RoHS Compliant**

9113- D 1 4 CB 30 D P R A
Series
D: Type D
1: 1 Row
4: Power Pin
CB: Dip Tin Plated
Contact Au+Pd/Ni Plated
A:Tray Package
R: Right Angle Type
P: With Post
D:Dip Type
30: 30 u"

Tolerances	Dwg.No.	9113-D0000-028		Title: 9113 Series Male Power 150AMP Connector	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
X=±0.5	Projection				P/N: 9113-D14CB30DPRA			
.X=±0.25	Unit mm	Scale	1:1		SHEET 1/1 Ver.No. R7			
.XX=±0.15	Drawn By	GYJ 10/30'25						