


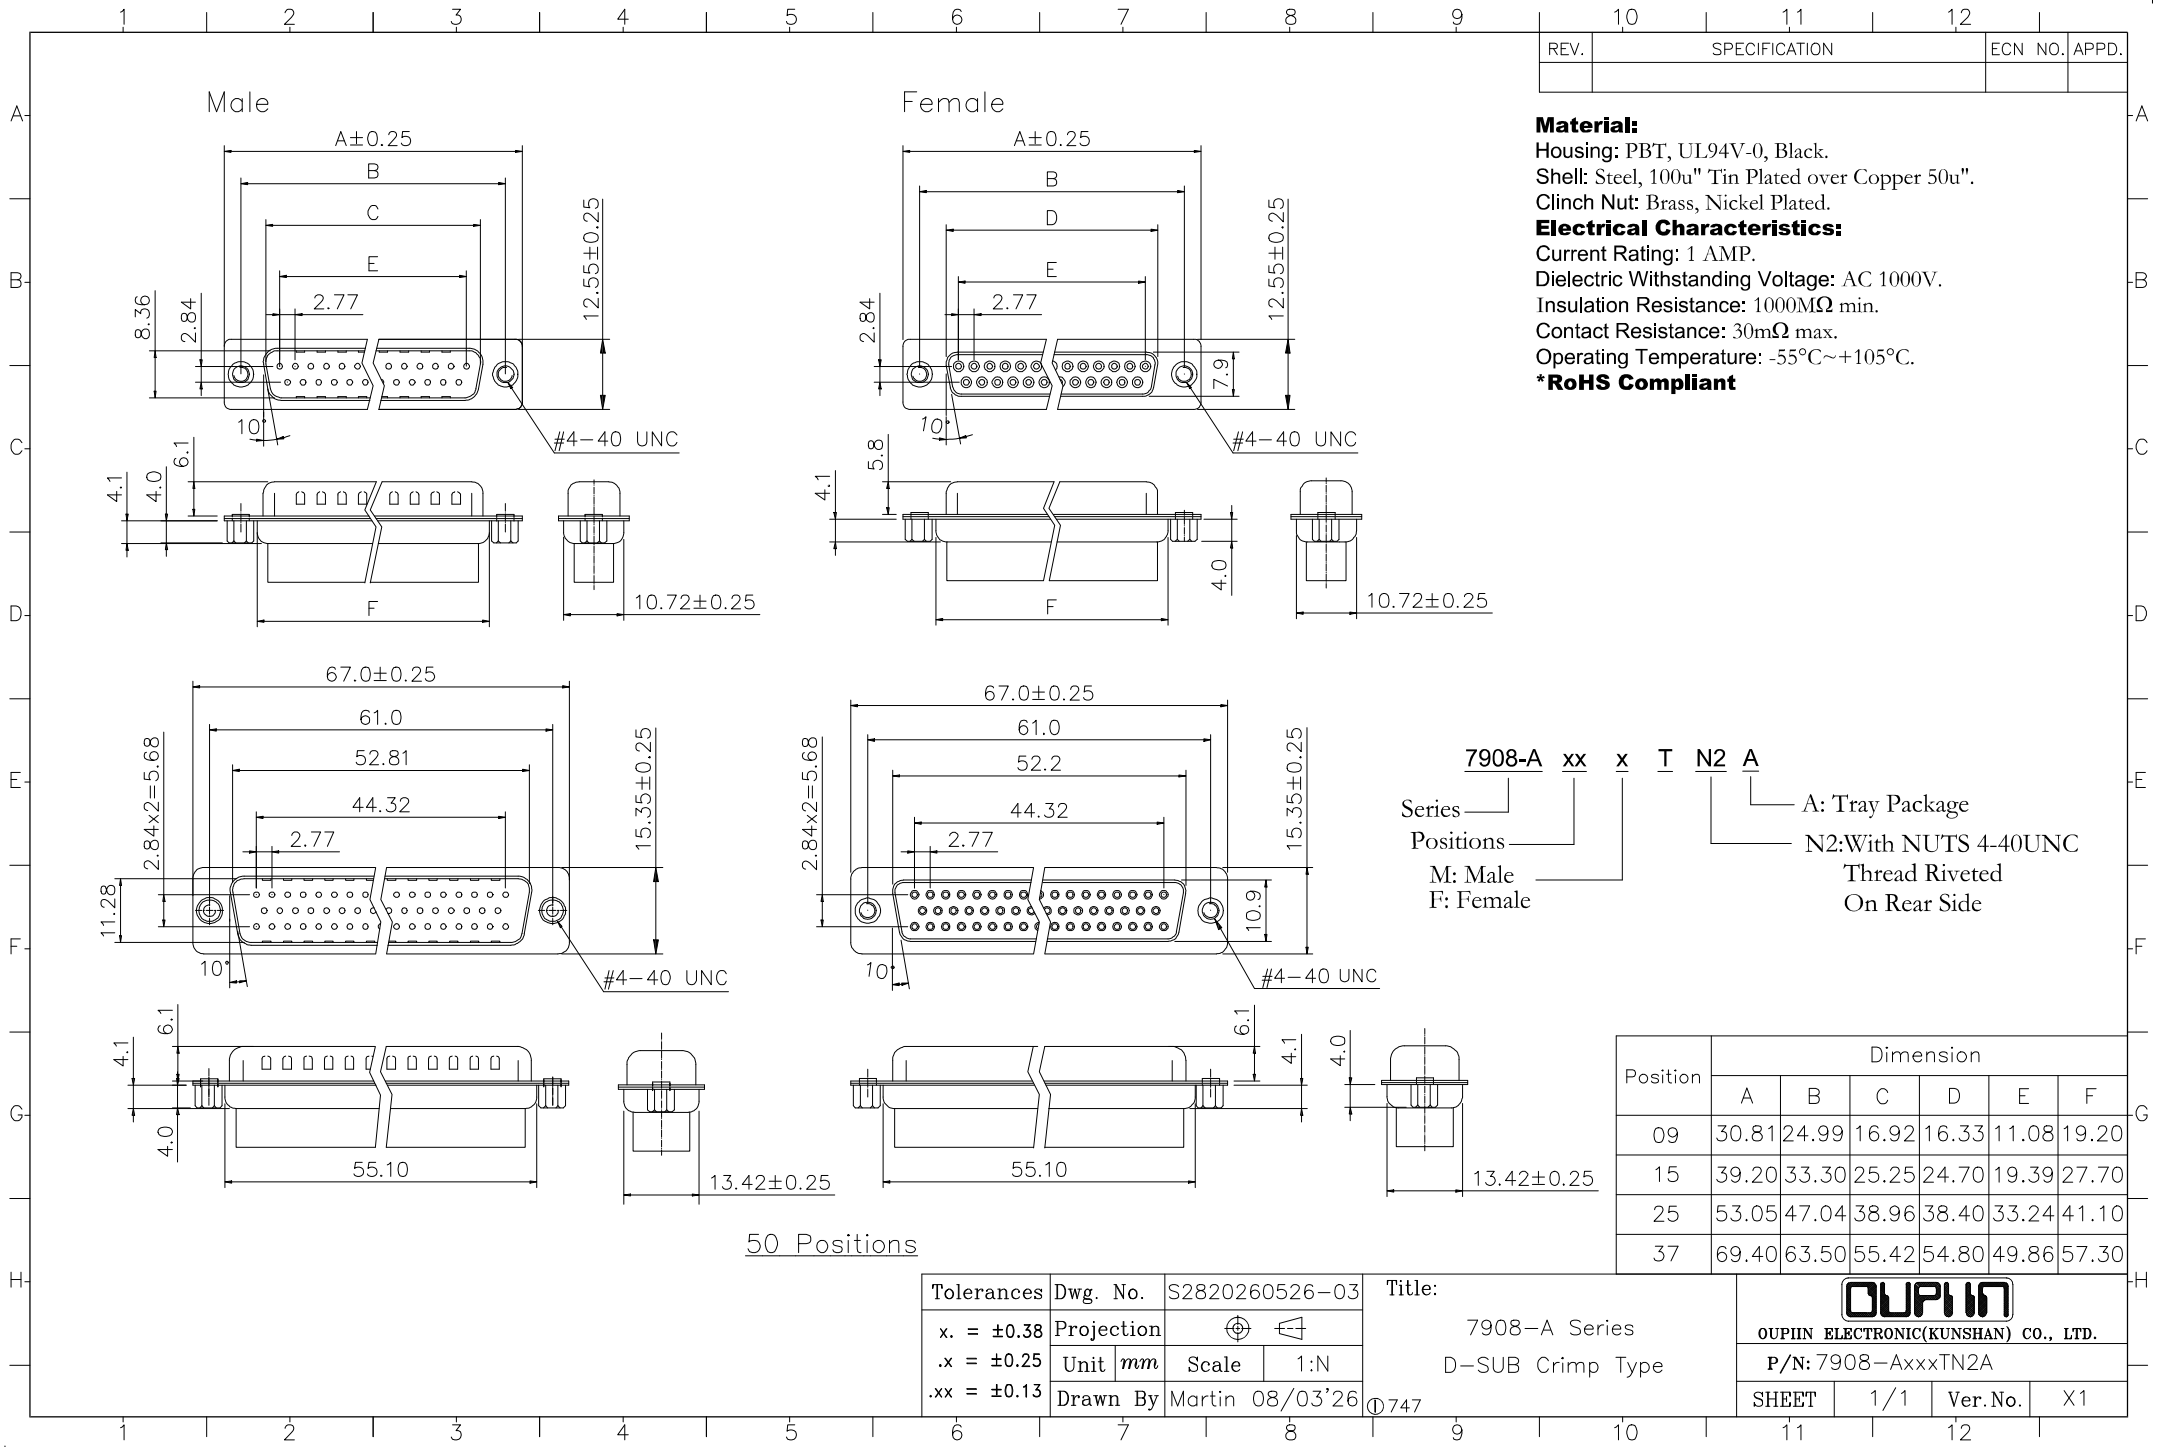

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0, Black.
Shell: Steel, 100u" Tin Plated over Copper 50u".
Clinch Nut: Brass, Nickel Plated.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

7908-A xx x T N2 A
Series —
Positions —
M: Male
F: Female
A: Tray Package
N2: With NUTS 4-40UNC
Thread Riveted
On Rear Side

Position	Dimension					
	A	B	C	D	E	F
09	30.81	24.99	16.92	16.33	11.08	19.20
15	39.20	33.30	25.25	24.70	19.39	27.70
25	53.05	47.04	38.96	38.40	33.24	41.10
37	69.40	63.50	55.42	54.80	49.86	57.30

Tolerances	Dwg. No.	S2820260526-03			Title: 7908-A Series D-SUB Crimp Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7908-AxxxTN2A SHEET 1/1 Ver.No. X1			
x. = ±0.38	Projection								
.x = ±0.25	Unit	mm	Scale	1:N					
.xx = ±0.13	Drawn By	Martin 08/03'26				⑦ 747			