

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: PBT, UL94V-0, Black.

Shell: Steel, 100u" Tin Plated over Copper 50u".

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V.

Insulation Resistance: 1000M Ω min.





Contact Resistance: 30m Ω max.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

Male

Female

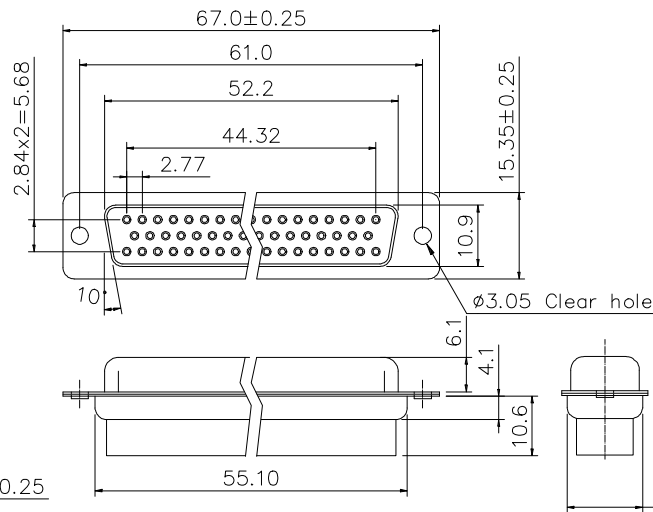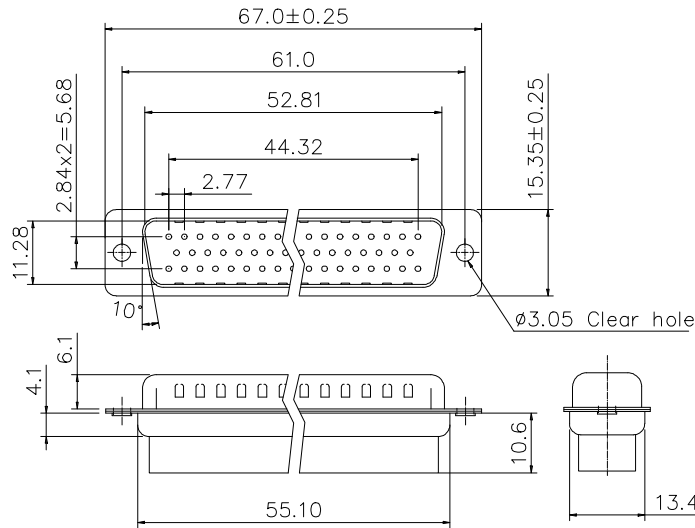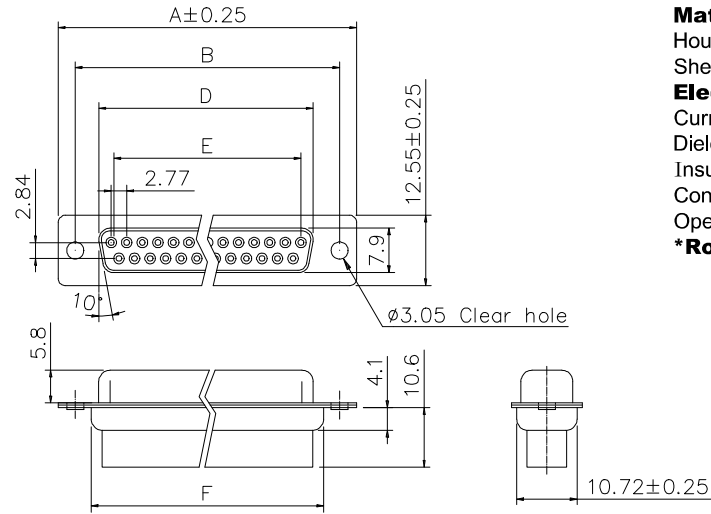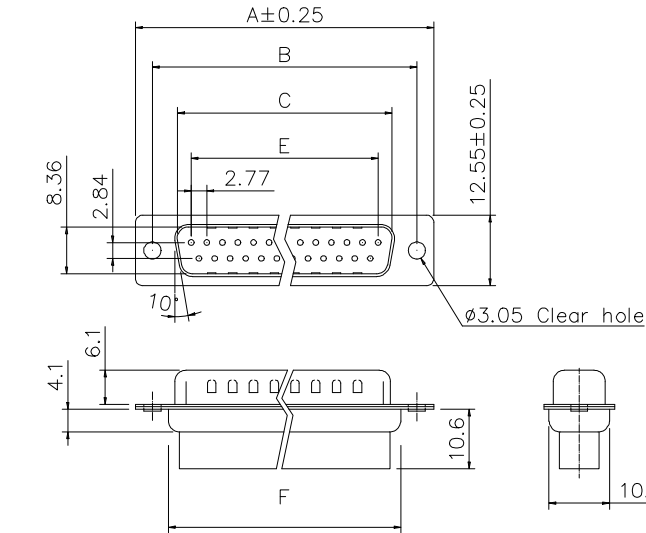

7908-A xx x T A
Series Positions
A: Tray Package
M: Male
F: Female

Position	Dimension					
	A	B	C	D	E	F
09	30.81	24.99	16.92	16.33	11.08	19.20
15	39.20	33.30	25.25	24.70	19.39	27.70
25	53.05	47.04	38.96	38.40	33.24	41.10
37	69.40	63.50	55.42	54.80	49.86	57.30

50 Positions

Tolerances	Dwg. No.		S2320260803-02	
x. = ±0.38	Projection			
.x = ±0.25	Unit	mm	Scale	1:N
.xx = ±0.13	Drawn By		Martin 08/03'26	

Title:

7908-A Series
D-SUB Crimp Type

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 7908-AxxxTA

SHEET	1/1	Ver.No.	X1
-------	-----	---------	----

747