

	10	11	12	
REV.	SPECIFICATION			ECN NO. APPD.



Material:

Housing: PBT, UL94V-0.

Shell: Steel, 100u" Tin Plated over Copper 50u".

Clinch Nut: Brass, Nickel Plated.

Electrical Characteristics:

Current Rating: 1 AMP.





Dielectric Withstanding Voltage: AC 1000V.

Insulation Resistance: 1000M Ω min.

Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

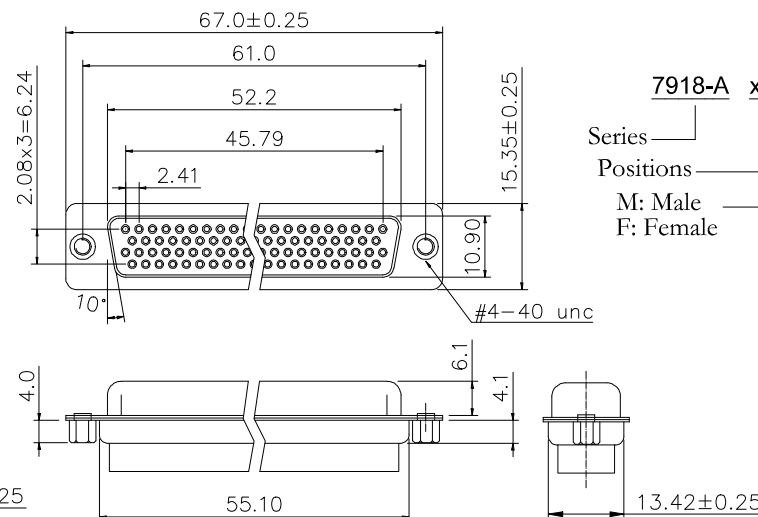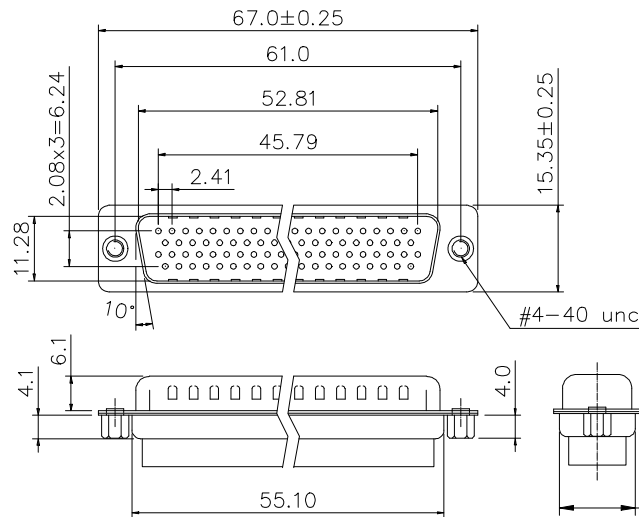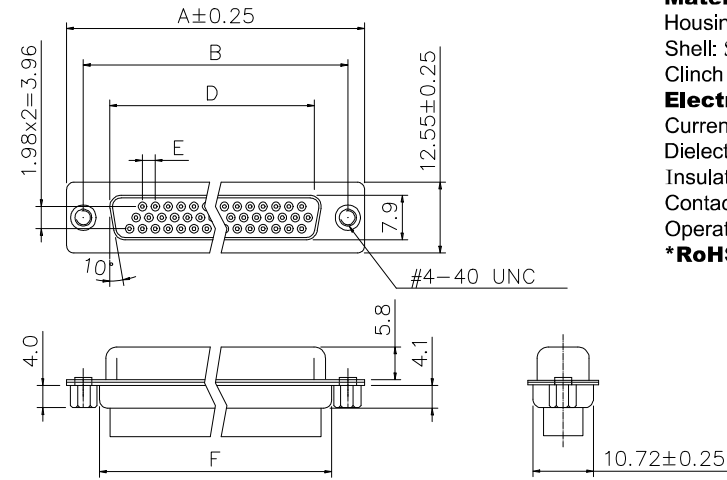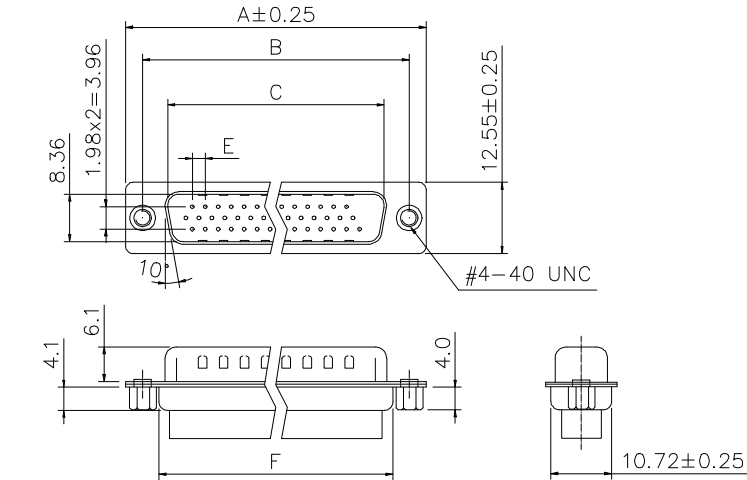

7918-A xx x T B N2 A
 Series ————
 Positions ————
 M: Male ————
 F: Female ————
 ———— A: Tray Package
 ———— N2: With NUTS 4-40UNC
 Thread Riveted
 On Rear Side
 ———— B: Black

Position	Dimension					
	A	B	C	D	E	F
15	30.81	24.99	16.92	16.35	2.29	19.20
26	39.20	33.30	25.25	24.70	2.29	27.70
44	53.05	47.04	38.96	38.40	2.29	41.10
62	69.40	63.50	55.42	54.80	2.41	57.30

78 Positions

Tolerances	Dwg. No.		S2320260803-01	
$x. = \pm 0.38$	Projection			
$.x = \pm 0.25$	Unit	mm	Scale	1:N
$.xx = \pm 0.13$	Drawn By		Martin 08/03'26	

Title:	7918-A Series
	H.D D-SUB
	Crimp Type

			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7918-AxxxTBN2A			
SHEET	1/1	Ver.No.	X1