

REV.	SPECIFICATION	ECN NO.	APPD.

Male

Female

Material:

Housing: PBT, UL94V-0.

Shell: Steel, 60u" Nickel Plated over Copper 50u".

Electrical Characteristics:

Current Rating: 1 AMP.







Dielectric Withstanding Voltage: AC 1000V.

Insulation Resistance: 1000M Ω min.



Contact Resistance: 20m Ω max.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

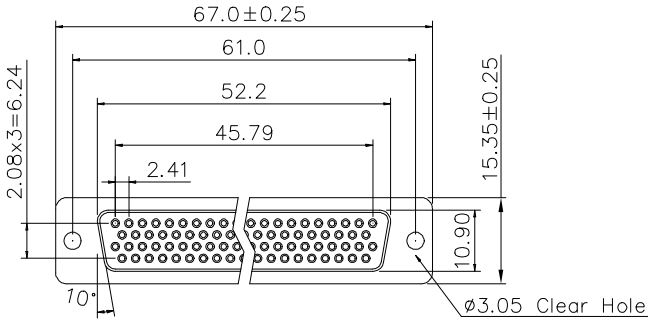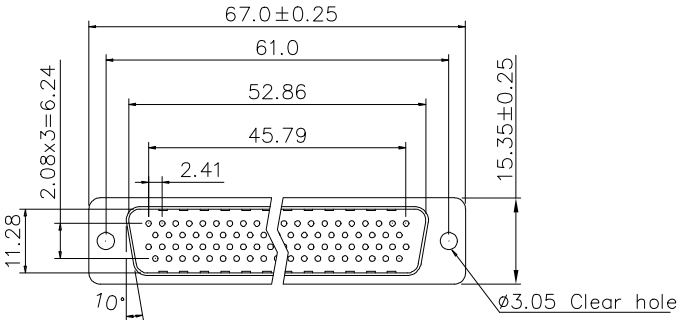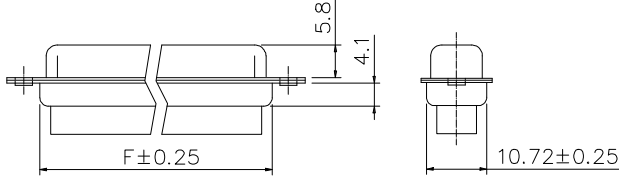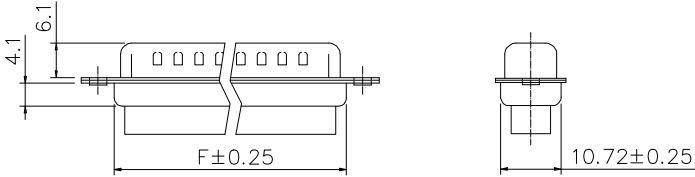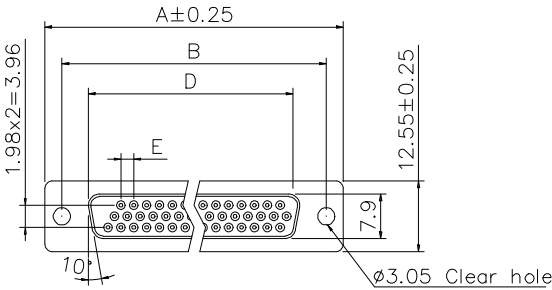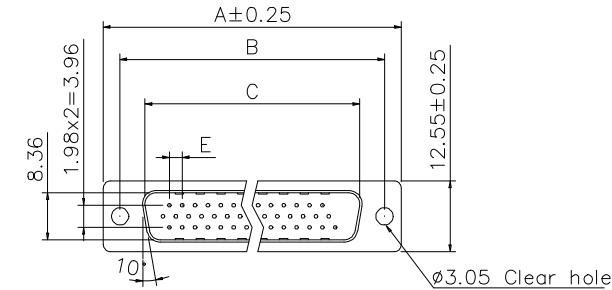

Series **7918-A** xx x **T** **B** **A**
Positions
M: Male
F: Female
A: Tray Package
B: Black

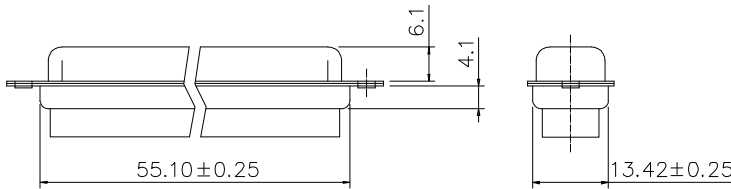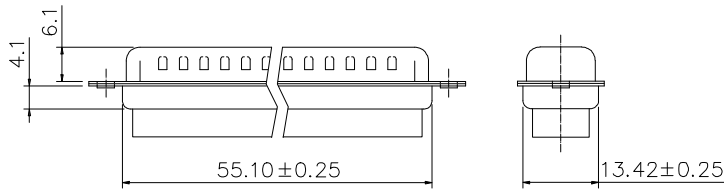

Position	Dimension					
	A	B	C	D	E	F
15	30.81	24.99	16.92	16.35	2.29	19.20
26	39.20	33.30	25.25	24.70	2.29	27.70
44	53.05	47.04	38.96	38.40	2.29	41.10
62	69.40	63.50	55.42	54.80	2.41	57.30

78 Positions

Tolerances	Dwg. No.		S2820260526-02	
x. = ±0.38	Projection			
.x = ±0.25	Unit	mm	Scale	1:N
.xx = ±0.13	Drawn By		Martin 09/21'26	

Title: 7918-A Series
H.D D-SUB
Crimp Type

747



OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 7918-AxxxTBA

SHEET	1/1	Ver.No.	X2
-------	-----	---------	----