


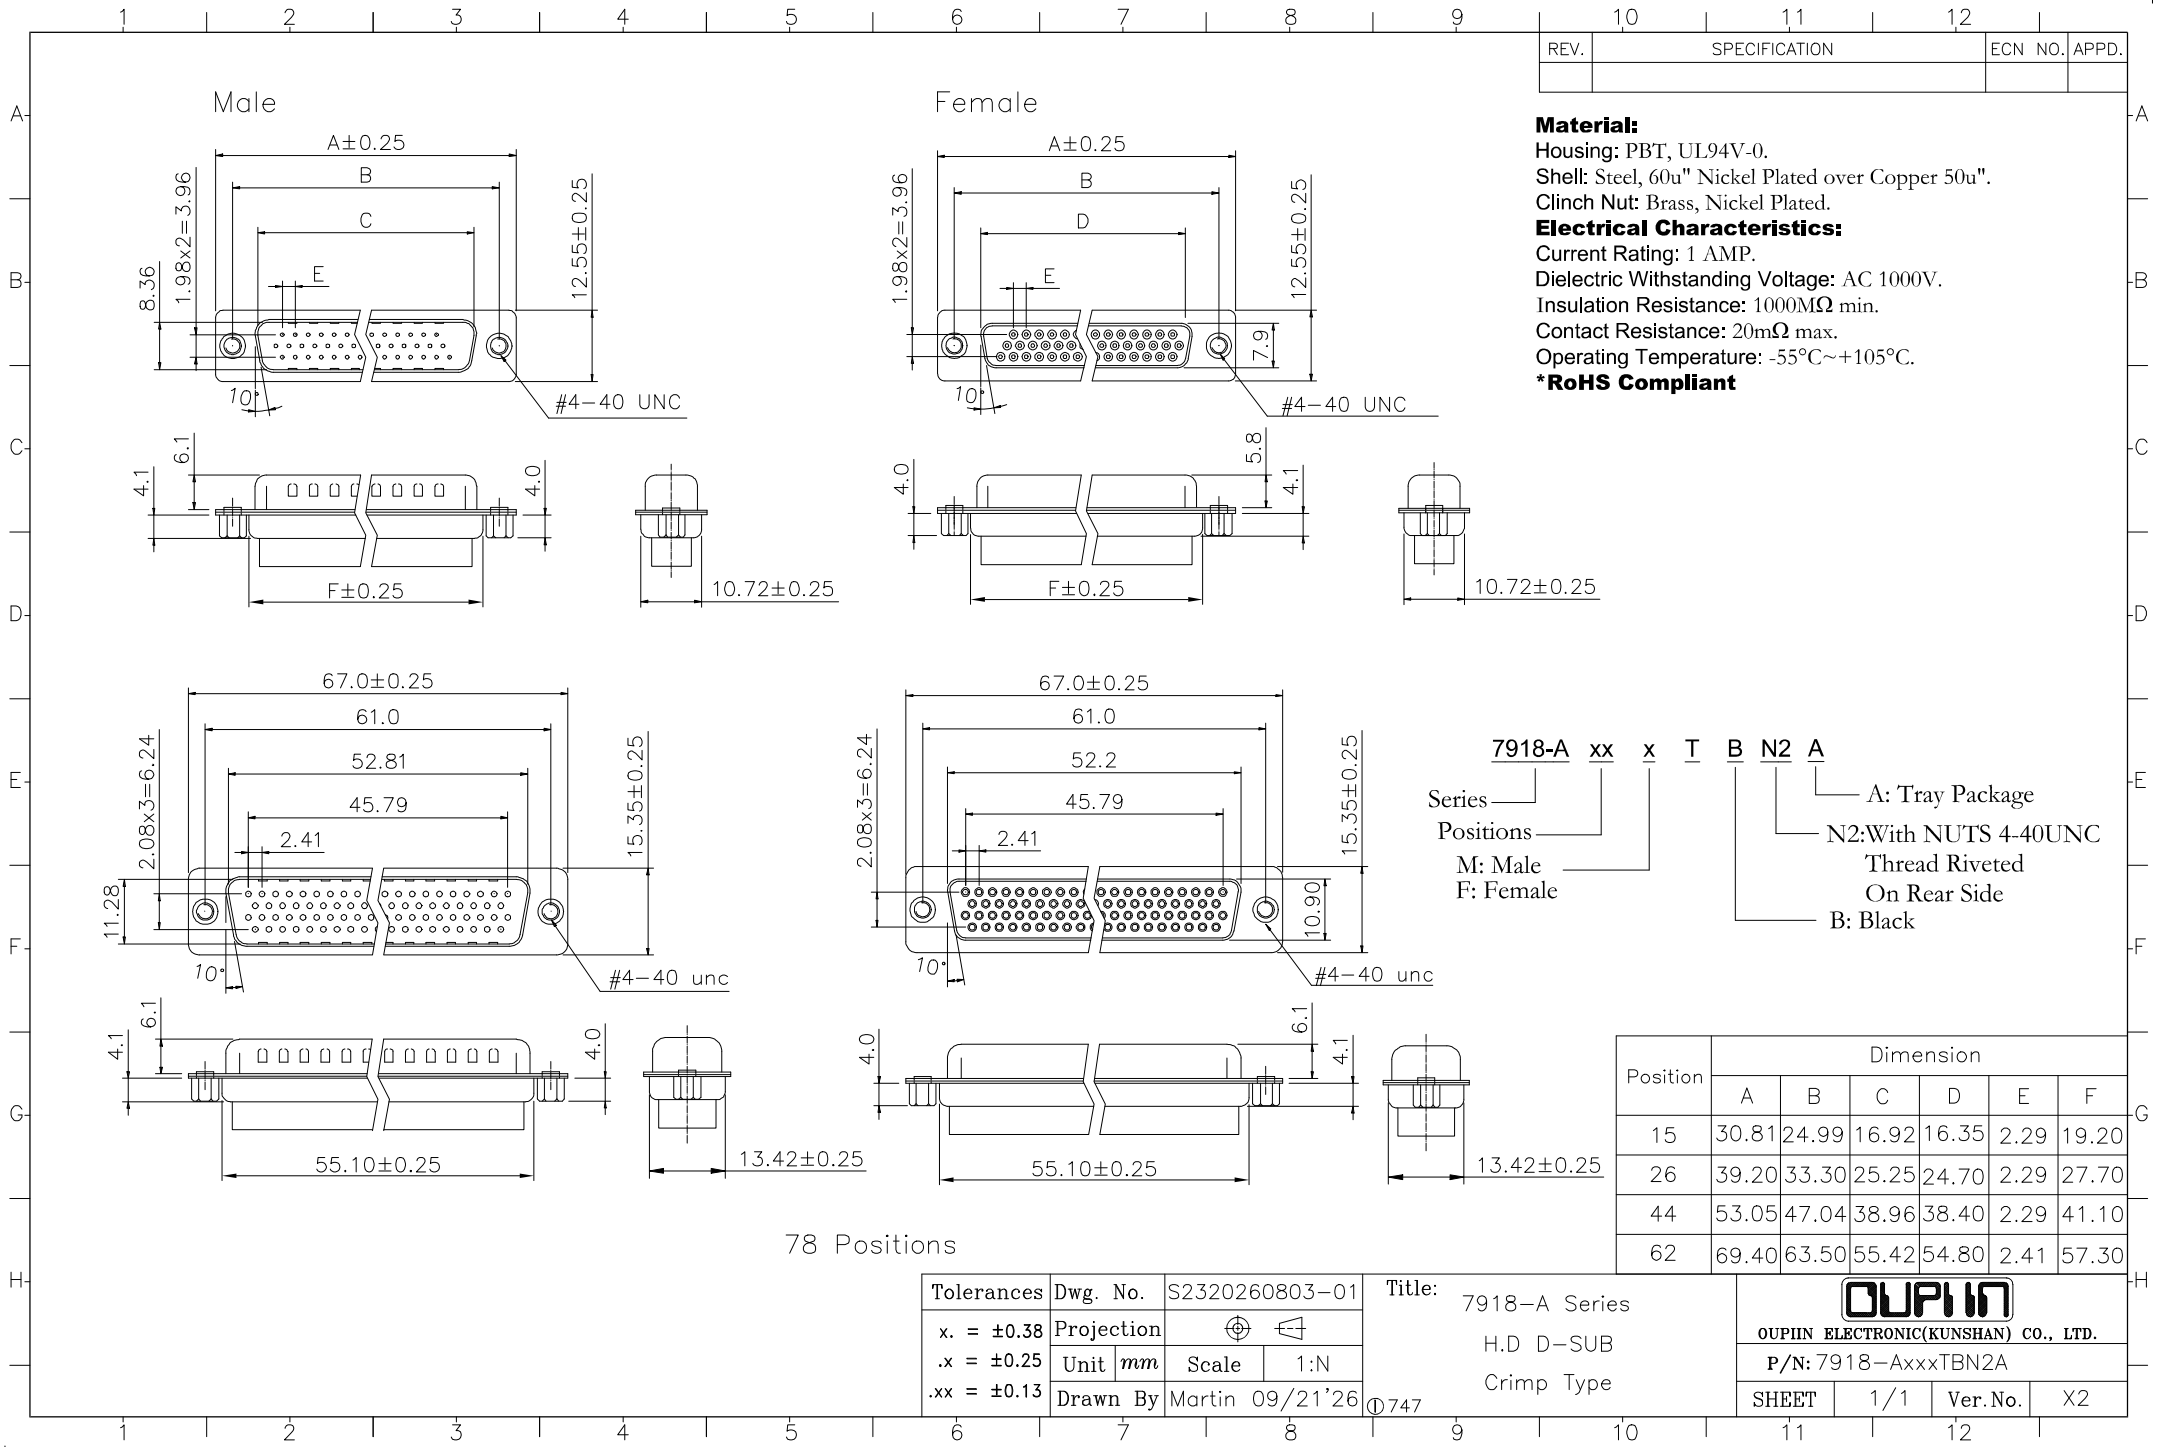

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Shell: Steel, 60u" Nickel Plated over Copper 50u".
Clinch Nut: Brass, Nickel Plated.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

7918-A xx x T B N2 A
Series ———
Positions ———
M: Male
F: Female
A: Tray Package
N2: With NUTS 4-40UNC
Thread Riveted
On Rear Side
B: Black

Position	Dimension					
	A	B	C	D	E	F
15	30.81	24.99	16.92	16.35	2.29	19.20
26	39.20	33.30	25.25	24.70	2.29	27.70
44	53.05	47.04	38.96	38.40	2.29	41.10
62	69.40	63.50	55.42	54.80	2.41	57.30

78 Positions

Tolerances	Dwg. No.	S2320260803-01		Title: 7918-A Series H.D D-SUB Crimp Type					
x. = ±0.38	Projection					OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
.x = ±0.25	Unit	mm	Scale	1:N	P/N: 7918-AxxxTBN2A				
.xx = ±0.13	Drawn By	Martin 09/21'26		747	SHEET	1/1	Ver.No.	X2	