REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and Gold Flash or 100u" Tin Plated on Solder Tail over Nickel 50u".
Shell: Steel, 60u" Nickel Plated over 50u" Copper.

Electrical Characteristics:
Voltage Rating: AC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

Male

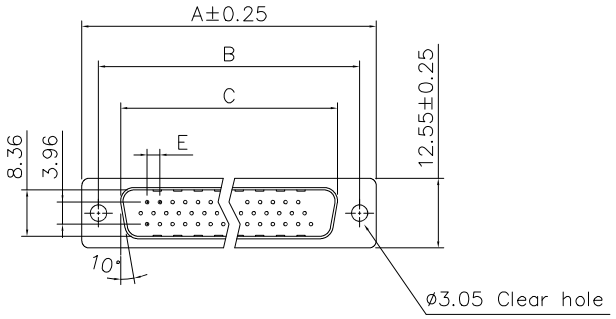

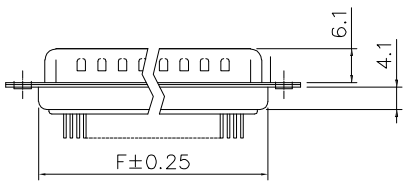



Female

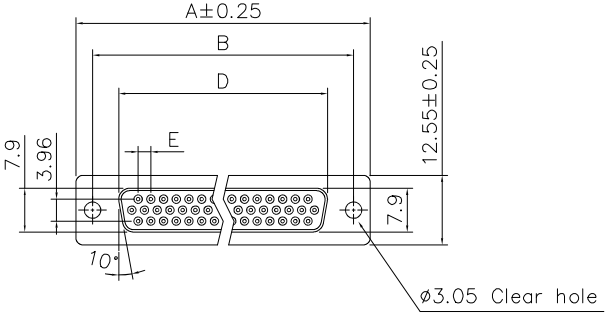

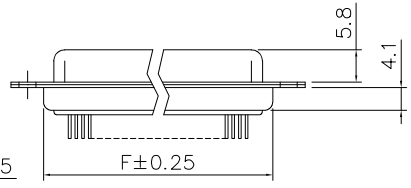



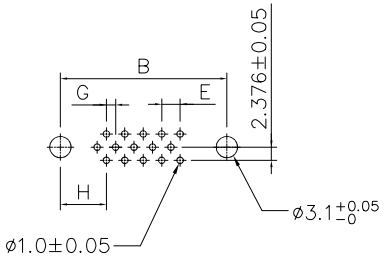

15 Positions

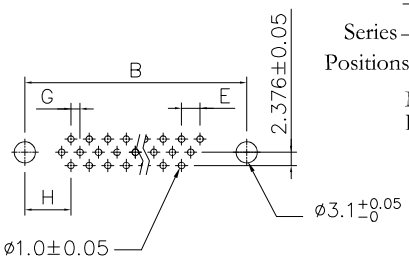

26, 44, 62 Positions

P.C.B Layout

7915-A xx x T x x xx A

- Series
- Positions
- M:Male / F:Female
- B:Black / U:Blue / W:White
- C:Selective Gold Plated / G: Gold Plated
- 00:Gold Flash / 15:15u" / 30:30u"
- A: Tray Package

Positions	A	B	C	D	E	F	G	H
15	30.81	24.99	16.92	16.33	2.29	19.20	1.145	7.04
26	39.20	33.30	25.25	24.70	2.29	27.70	1.145	6.88
44	53.05	47.04	38.96	38.40	2.29	41.10	1.145	6.88
62	69.40	63.50	55.42	54.80	2.41	57.30	1.205	7.00

Tolerances	Dwg. No.	S0320240306-01	Title:
x. = ±0.38	Projection		7915-A Series
.x = ±0.25	Unit mm	Scale 1:N	H.D D-SUB Straight Type
.xx = ±0.13	Drawn By	Martin 09/22'26	① 747

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 7915-AxxxTxxxxA

SHEET 1/1 Ver.No. X2